




BISON GEAR

Jerry Can Mount Installation guide

CAN-20L

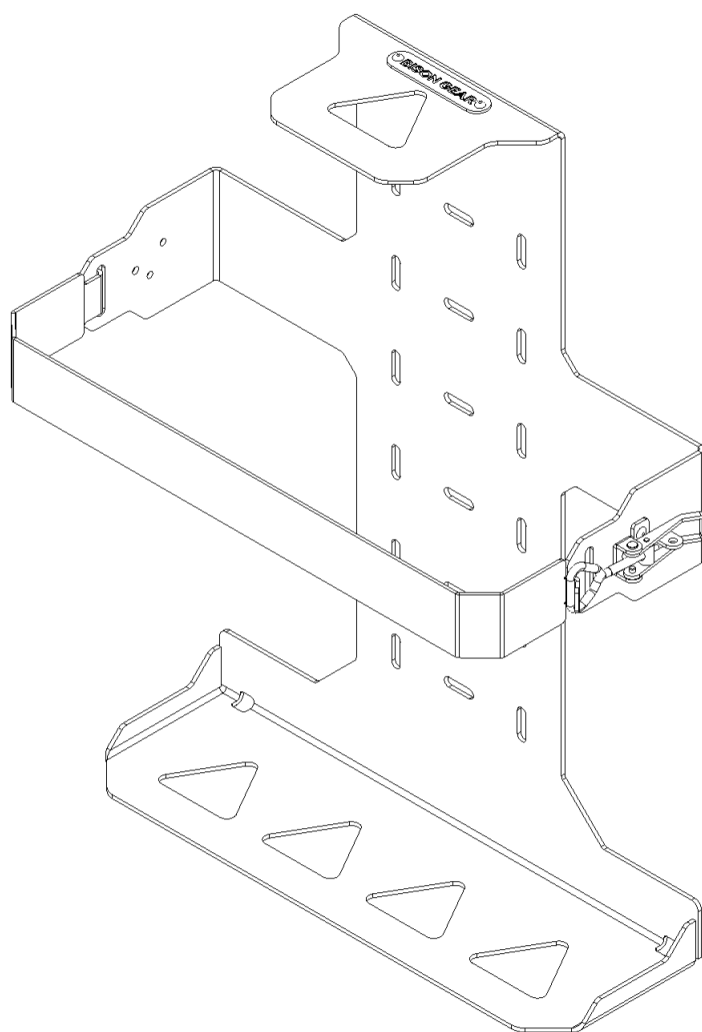




BISON GEAR

Before you start



Before installation:

- Familiarize yourself with these instructions.
- Ensure that all listed parts and hardware are included in the package.
- Gather the required tool.

Part list

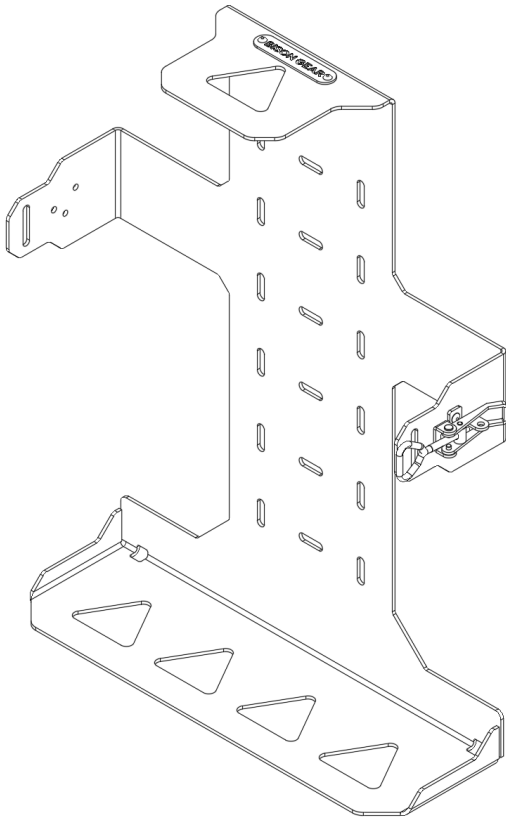No.	PART	QTY	IMAGE
1	Jerry Can Mount	1	

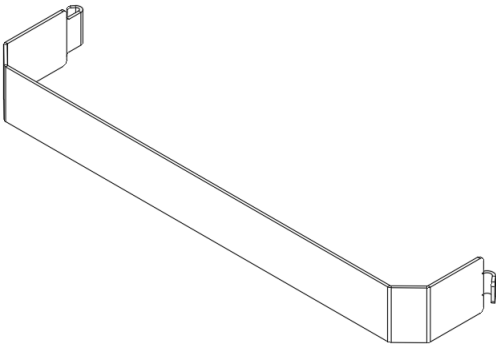

2	Metal security band	1	
INSTALLATION KIT			
3	Nut M6 M6 DIN 6923	4	
4	Bolt M6x16 ISO 7380-2	4	




BISON GEAR

List of necessary tools¹:

- 4 mm Allen Key (Hex)
- 10 mm wrench

Torque settings:

During assembly, use the recommended tightening torques for screw, unless other parameters are specified for a given connection.

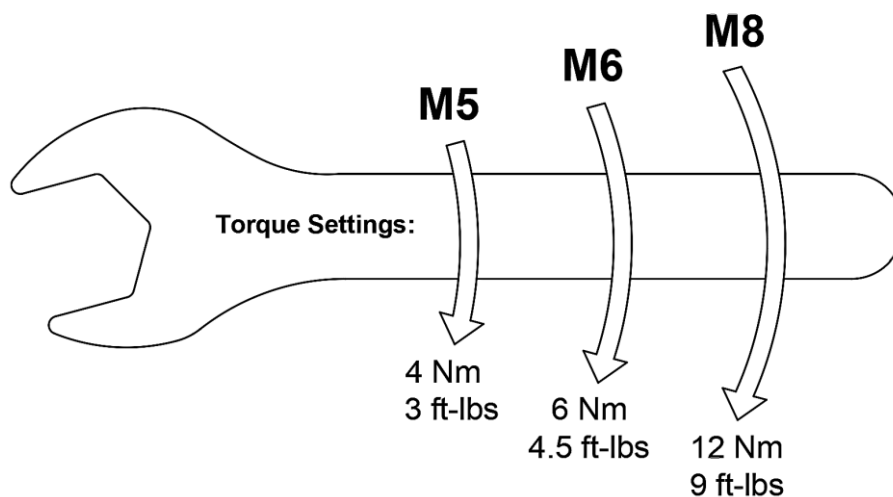

¹ NOTE: The tools **are not** the part of the set.
bison-gear.com



BISON GEAR

Installation:

the Universal 20L Canister Mount Bison Gear – a game-changing solution designed to ensure your essential supplies are always secure and accessible during your adventures. Crafted with precision and durability in mind, this mount offers a seamless storage solution for your 20L canister.

The installation must be secured to a rigid surface using at least four M6 bolts (e.g., a side panel, universal wheel mount, aluminum profile, or another structurally rigid surface).

The example below illustrates installation using the Bison Gear Universal Wheel Mount, which is the most common installation method.

!!!! The Wheel Mount is not part of the set .

Follow the steps below to install product correctly:


1. Start by preparing the product parts and gathering the necessary tools.
2. Pre-assemble the Jerry Can Mount to the wheel mount using M6 × 16 bolts and M6 nuts.

Adjust the position of the product as needed, then fully tighten the bolts.

The diagram below illustrates the connection method between these components.




BISON GEAR

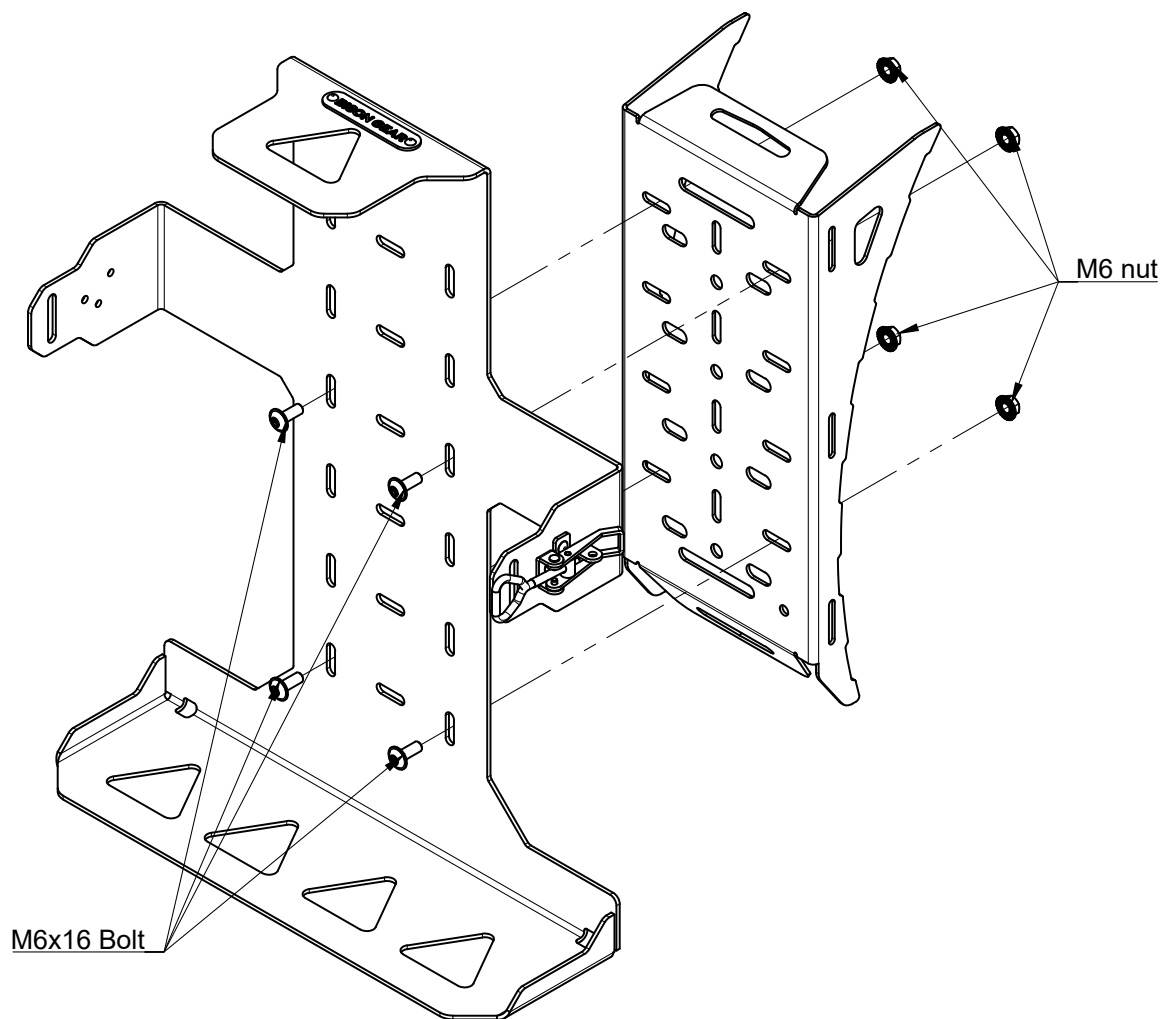



BISON GEAR

3. At least, place the Jerry Can on the holder and secure it using the security band by placing the wider hook end into the holder slot and fastening the second end with a toggle latch.

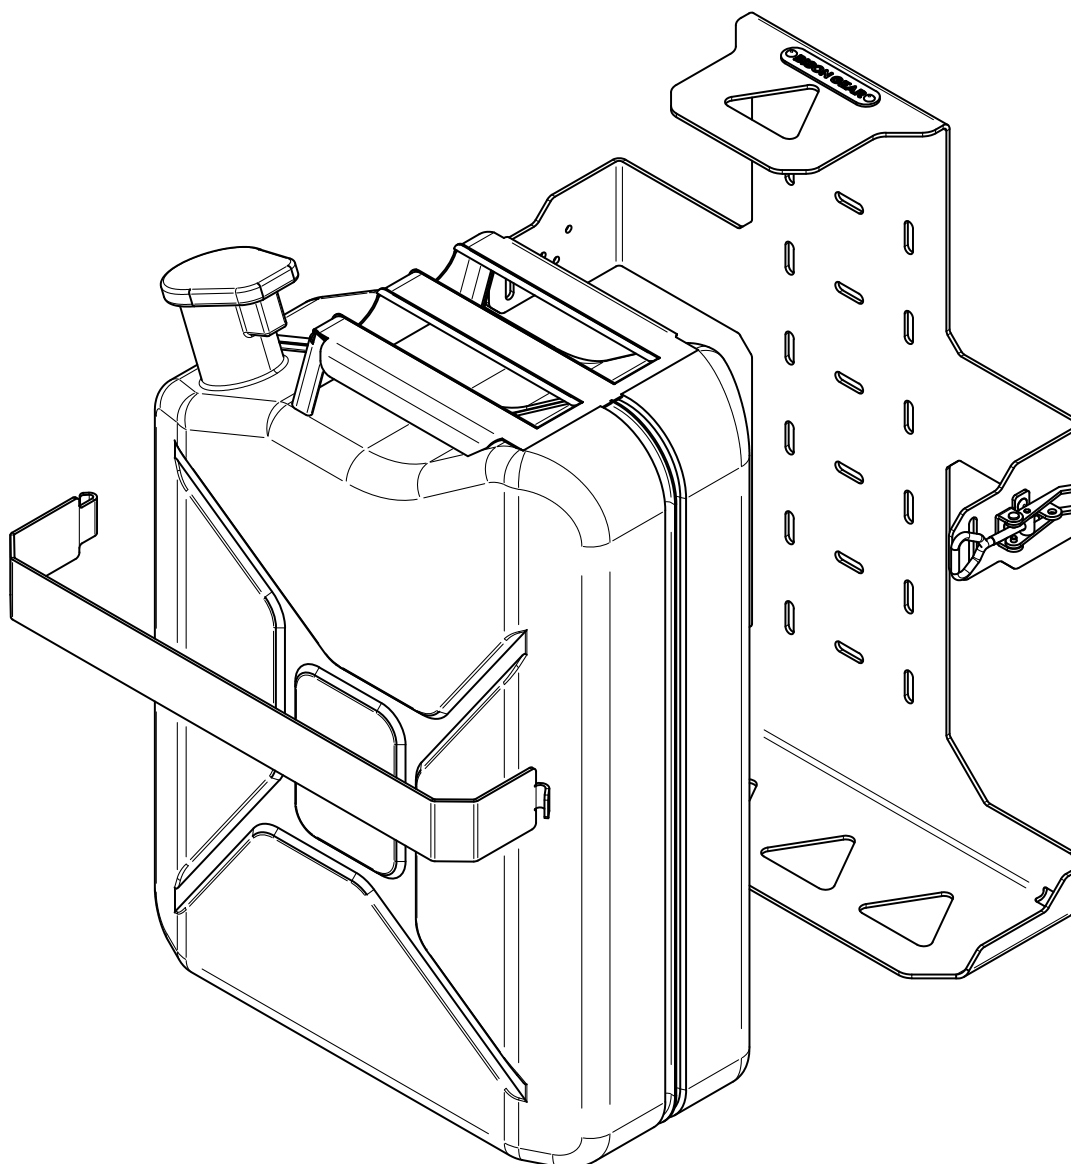

Make sure that everything is mounted properly, and all the bolts are tightened. If everything is correct, your work is done.

After driving 50km, check all the bolts and retighten them if necessary.



BISON GEAR

Have a great time with Bison Gear products!



Email: contact@bison-gear.com

Phone: **+48 505 642 981**