


Cargo BOX with Tilting Slider Installation Guide

CR-BOX-TL-700

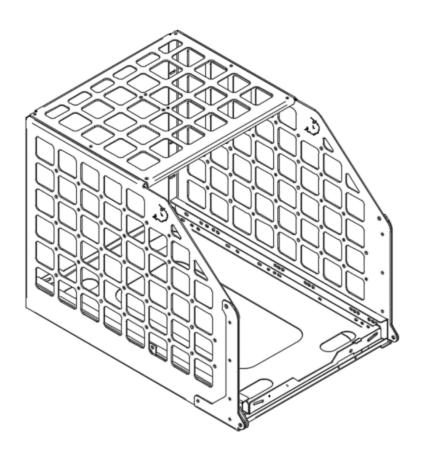

Before you start

Familiarize yourself with these instructions. The Cargo Box is shipped in one package. Ensure that all listed parts and hardware are present in package. Parts are pre-assembled;

bison-gear.com Page 1 of 7



you must mount several of them. Locate a flat surface or floor with a minimum area of 1.5 **x 1.5 meters**. Gather the required tools.



Part list

LP	PART	QTY	IMAGE
1	Slider	1	
2	Left panel	1	
3	Right panel	1	

bison-gear.com Page **2** of **7**



4	Top panel	1	
5	Back panel	2	
6	Gas spring	2	+
7	Bolt M5x12	16	
8	Nut M5	16	

\times List of necessary tools¹:


- 3 mm Allen Key (Hex)
- 4 mm Allen Key (Hex)
- 8 mm wrench
- 10 mm wrench

bison-gear.com Page 3 of 7

¹ NOTE: The tools **are not** the part of the set.



Cargo Box Diagram

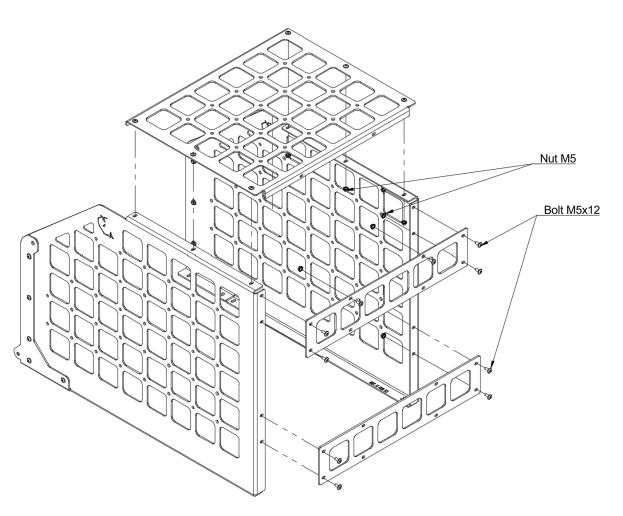

bison-gear.com Page 4 of 7




A Installation:


Before you start to work, familiarize with the **Cargo Box Diagram** on **page 4**. There is an exploded view that shows you how to install the cargo box. Follow the steps below to install the product correctly:

- 1. Screw together all parts of cargo box (**left, right, top and back panels**) using **M5 bolts** and **nuts**. Upper and back panel mount the last.
- 2. Insert the **slider** into cargo box. On the slider you must prepared **bolt**, **nut** and **spacer** (picture below).



In the cargo box are **holes** where you need screw the slider to the box (picture below).





bison-gear.com Page 5 of 7



- 3. Use the **plastic spacer** to fill the gap between the parts.
- 4. You must put the **spring gas** on prepared **ball joints**. There is one ball joint on the slide and one on the cargo box (picture below).



5. Now, your cargo box with slider is ready to install it to your car. To properly mount it to the car, use the **oblong holes** on the bottom surface.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50 km with the cargo box, check all the bolts and re-tighten them if necessary.

bison-gear.com Page 6 of 7



Have a good time with Bison Gear products!



Email: contact@bison-gear.com

Phone: +48 505 642 981

bison-gear.com Page **7** of **7**