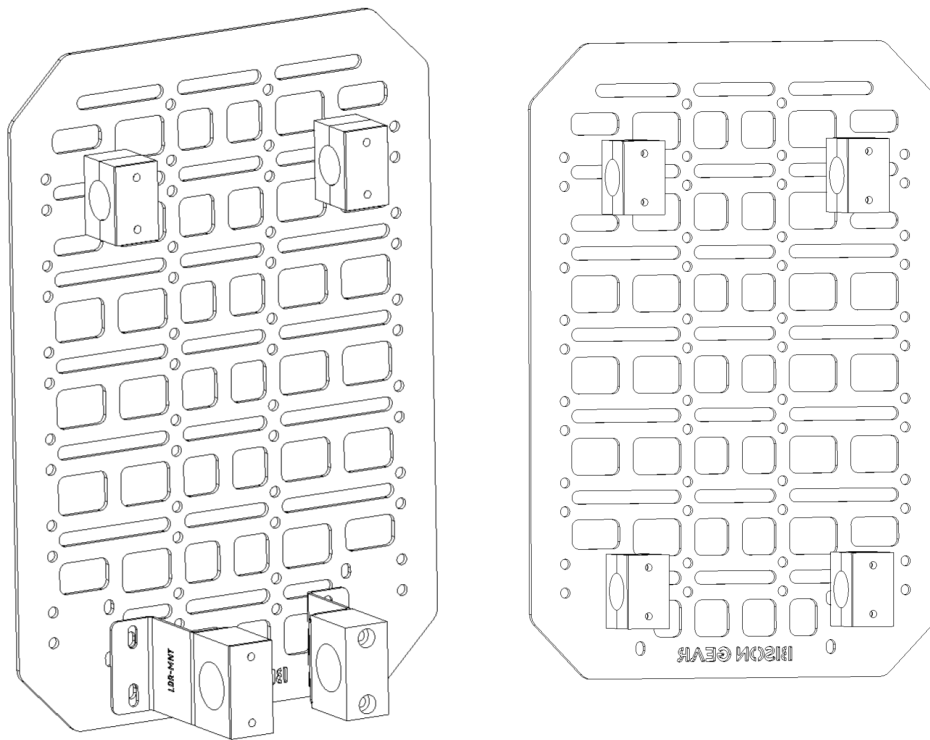




BISON GEAR

INEOS Grenadier Ladder MOLLE Panel Installation Guide

LDR-MNT-GRND



Before you start

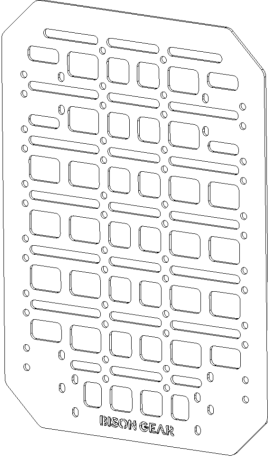



Familiarize yourself with these instructions. Ensure that all listed parts and hardware are present in package. Gather the required tools.

The product is ready for installation along the ladder. It is mounted in two combinations – at the bottom part of the ladder (version A) or at the top part of the ladder (version B). Both are described in the next part of the manual.






BISON GEAR

Part list

No.	PART	QTY	IMAGE
1	Panel	1	
2	Bottom bracket	2	
3	Pipe clamp Dim. 25	4	
4	Pipe clamp Dim. 30	2	



BISON GEAR

5	Flange nut M6 DIN 6923	4	
6	Flange Bolt M6x45 ISO 7380-2	12	
7	Flange Bolt M6x16 ISO 7380-2	4	

List of necessary tools¹:

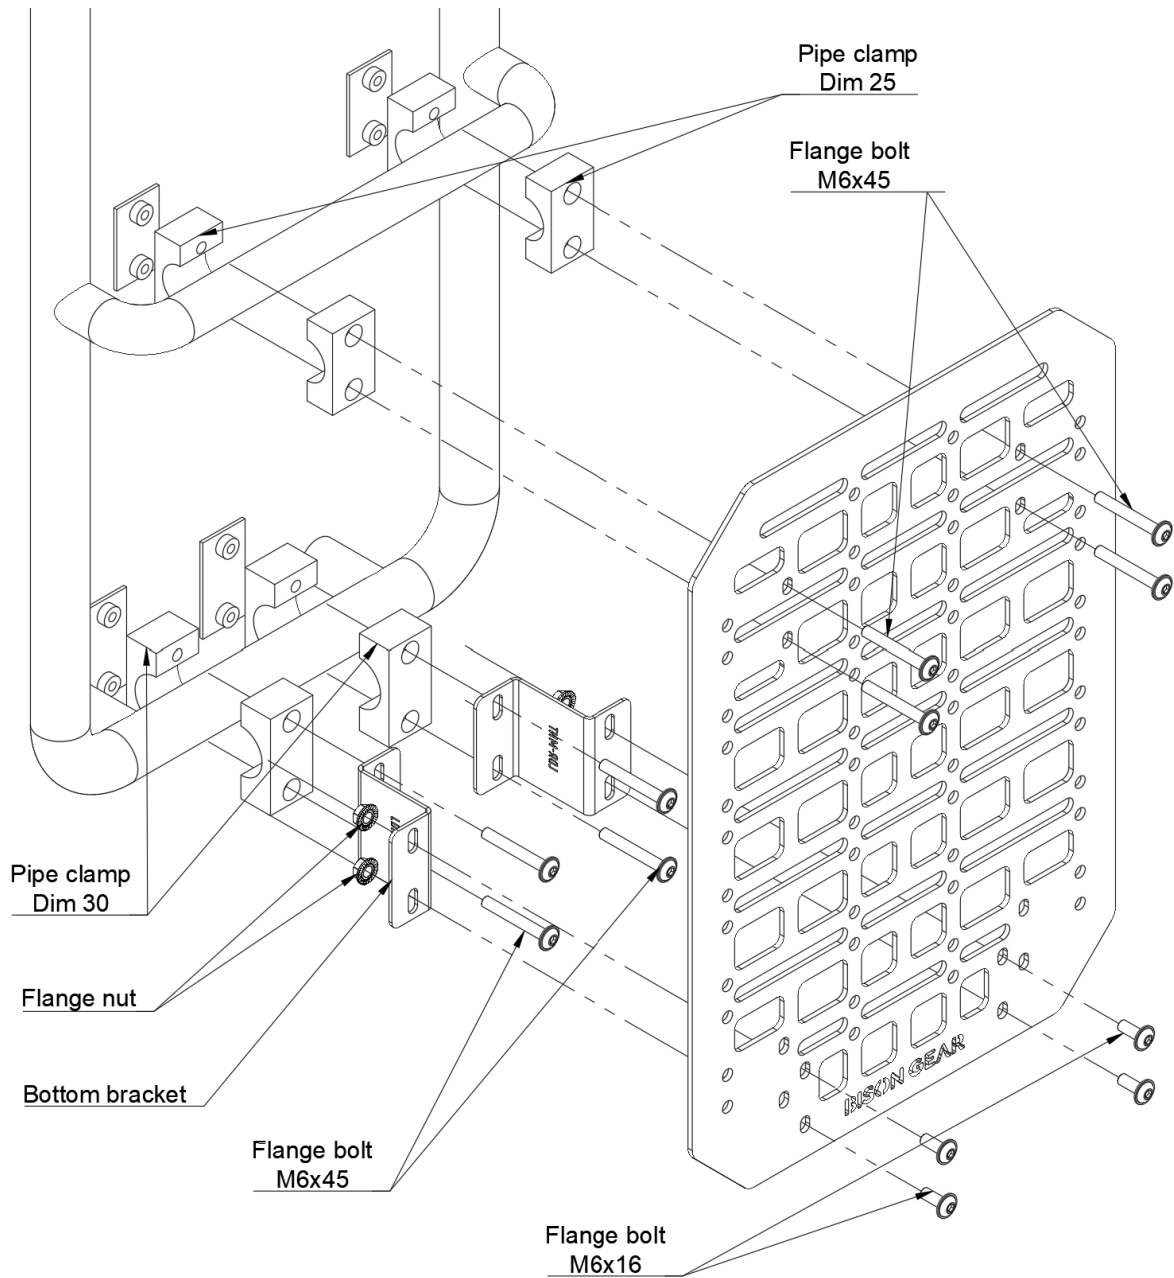
- **4 mm Allen Key (Hex)**
- **10 mm wrench**

¹ NOTE: The tools **are not** included in the set.



BISON GEAR

Version A





BISON GEAR

Installation:

Before you start to work, familiarize with the **Diagram** on **page 4**. There is an exploded view that shows you how to assemble panel parts together. **Version A** is designed to be mounted on the bottom part of the ladder.

Follow the steps below to the product correctly:

1. Start by preparing the product parts and gathering the necessary tools.
2. Pre-screw the **pipe clamp dims 30** and **bottom bracket** to the ladder.
3. Regulate the **width between the clamp** (about 54 mm between the clamp) and tighten the bolts.
4. Pre-screw the **panel** to the bottom bracket.
5. Pre-screw the **pipe clamps dim 25**.
6. Adjust the **position** of the panel.
7. Tighten **all the bolts and nuts**.

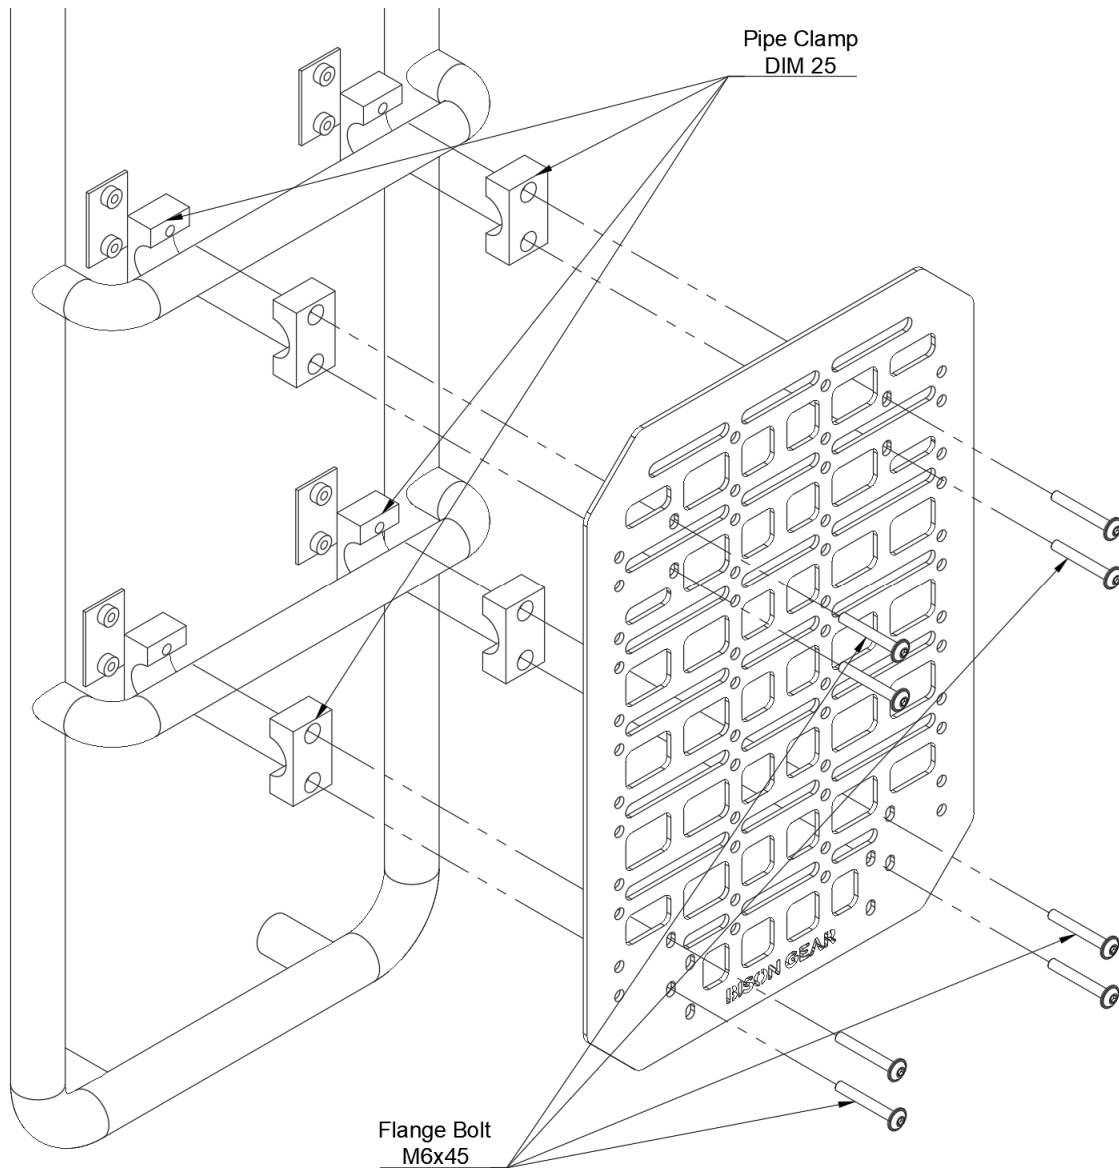
Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50km, check all the bolts and re-tighten them if necessary.



BISON GEAR

Version B





BISON GEAR

Installation:

Before you start to work, familiarize with the **Diagram** on **page 6**. There is an exploded view that shows you how to assemble panel parts together. **Version B** is designed to be mounted on the top parts of the ladder.

Follow the steps below to the product correctly:

1. Start by preparing the product parts and gathering the necessary tools.
2. Pre-screw the **pipe clamps dim 25** using **M6x45 flange bolts**.
3. Adjust the **position** of the panel.
4. Tighten all the **bolts and nuts**.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50km, check all the bolts and re-tighten them if necessary

Have a good time with the Bison Gear product!



Email: contact@bison-gear.com

Phone: **+48 505 642 981**