




**BISON GEAR**

# License Plate Bracket Installation Guide

**LP-SMALL-US**

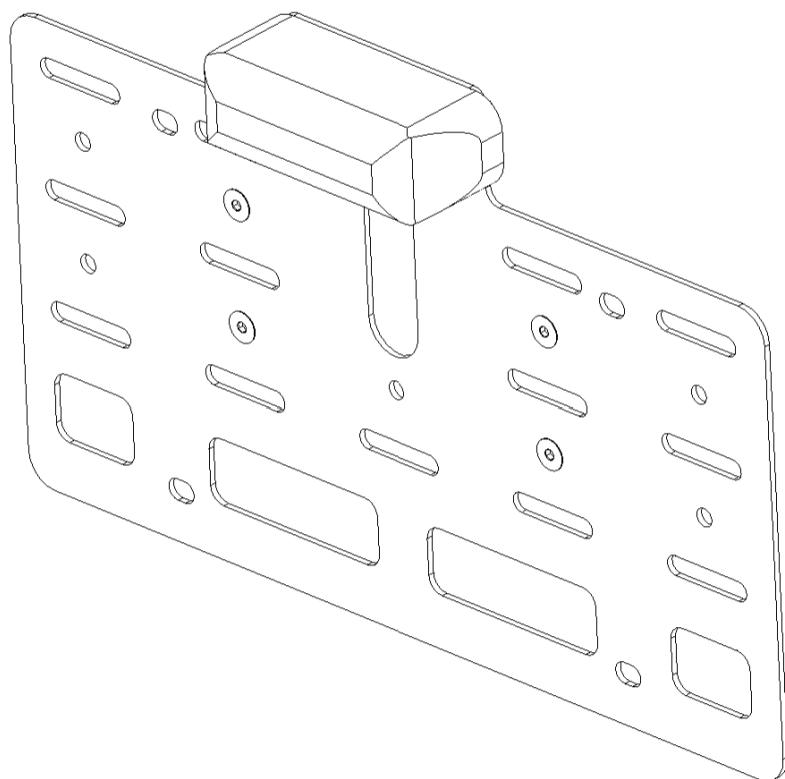



**BISON GEAR**

## 💡 Before you start

Before installation:

- Familiarize yourself with these instructions.
- Ensure that all listed parts and hardware are included in the package.
- Gather the required tools.

## ⚙️ Part list

No.	PART	QTY	IMAGE	
1	Licenze plate Bracket	1		<input checked="" type="checkbox"/>
2	Sleeve 6.5/15 H=7	4		<input type="checkbox"/>
4	Countersunk bolt M5x20 ISO 7991	4		<input type="checkbox"/>
5	Flange nut M5 DIN 6923	4		<input type="checkbox"/>




## ☒ List of necessary tools<sup>1</sup>:

- **3 mm Allen Key (Hex)**
- **8 mm wrench**
- **6 mm drill for metal**
- **driller**
- **\*(optional) torque wrench**

## ☒ Torque settings:


During assembly, use the recommended tightening torques for screw, unless other parameters are specified for a given connection.

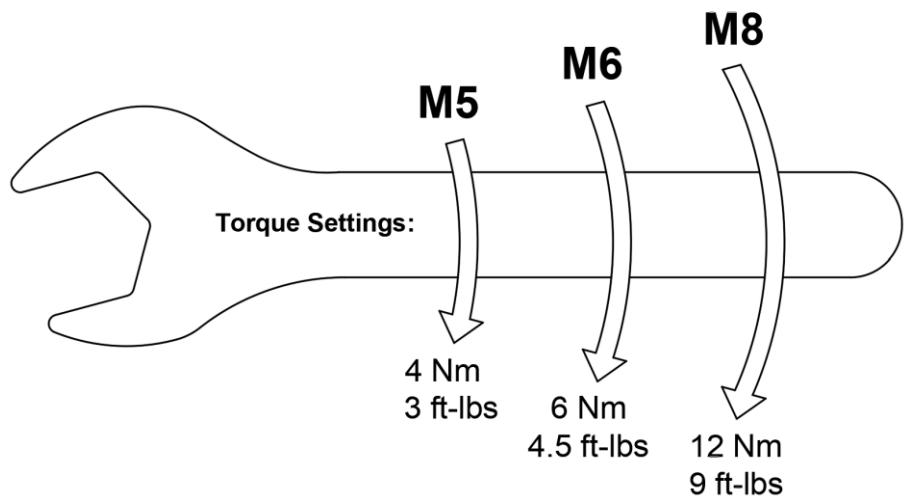

<sup>1</sup> NOTE: The tools are not the part of the set.



**BISON GEAR**

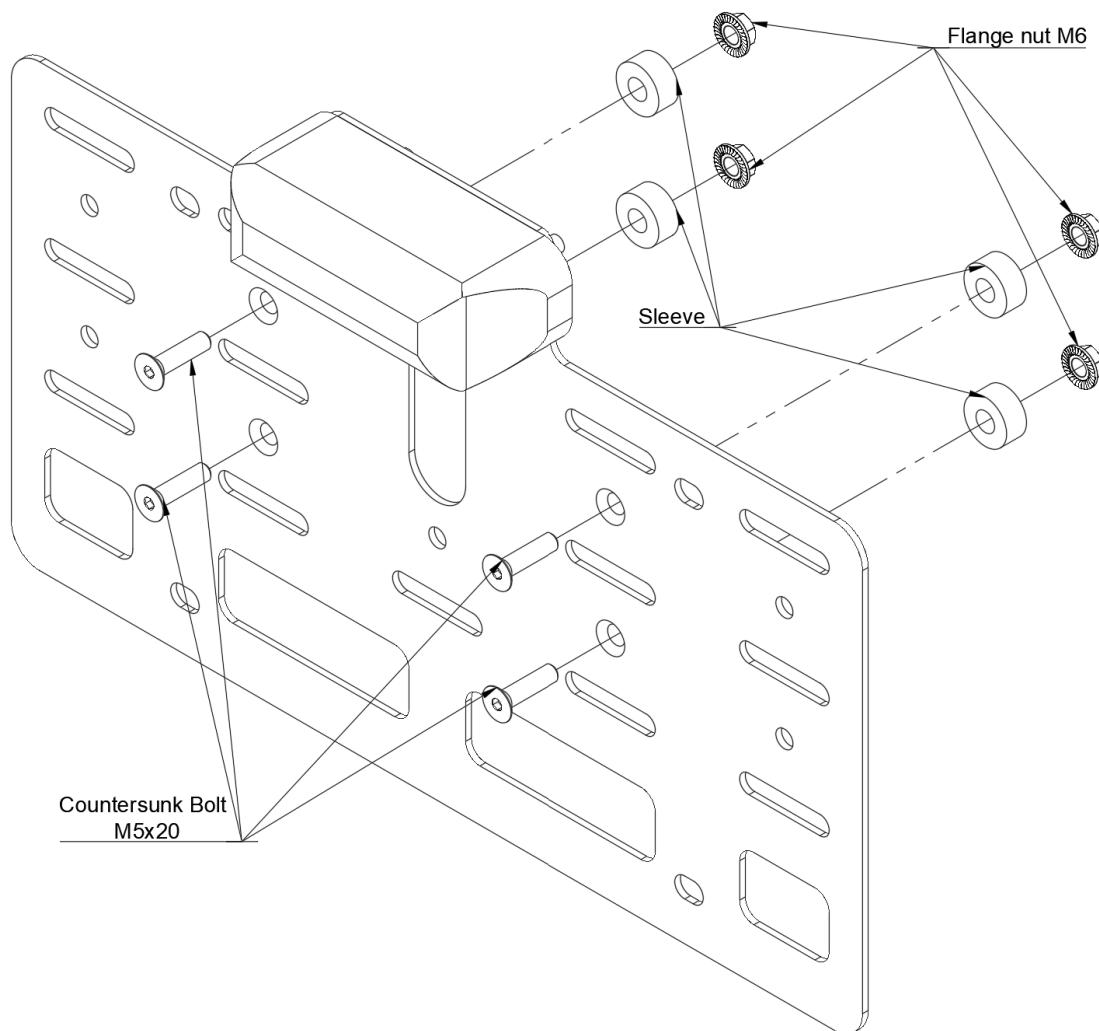



## Installation:

Before you begin, review the product diagram on page 4.

The exploded views illustrate how to assemble and mount the license bracket.

**The installation requires drilling holes.**

Follow the steps below to install product correctly:

1. Choose the best bracket position on the vehicle back door.
2. Mark the position of the holes.
3. Before you start drilling, make sure the chosen position is correct.
4. Drill 6 mm holes at marked position.
5. \*\*\* It is recommend to paint the drilled holes to protect against rust.
6. Place the bracket - the sleeves should be placed between the bracket and car body.
7. Place the nuts on the bolts and tighten them.



**BISON GEAR**

8. Connect the electrical wiring to the license plate lamp.

*(This installation guide does not include detailed instructions for the electrical connection, as the bracket is universal and can be used with various car models that have different electrical systems.)*

9. At least, place and screw the license plate on the bracket.

Ensure that everything is mounted correctly and all bolts are tightened. If everything is in place, your installation is complete.

**After driving 50 km, check all the bolts and retighten them if necessary.**

**Have a great time with Bison Gear product!**



Email: [contact@bison-gear.com](mailto:contact@bison-gear.com)

Phone: +48 505 642 981