




BISON GEAR

LAND CRUISER 100 ROOF SHELF INSTALLATION GUIDE

SH-100

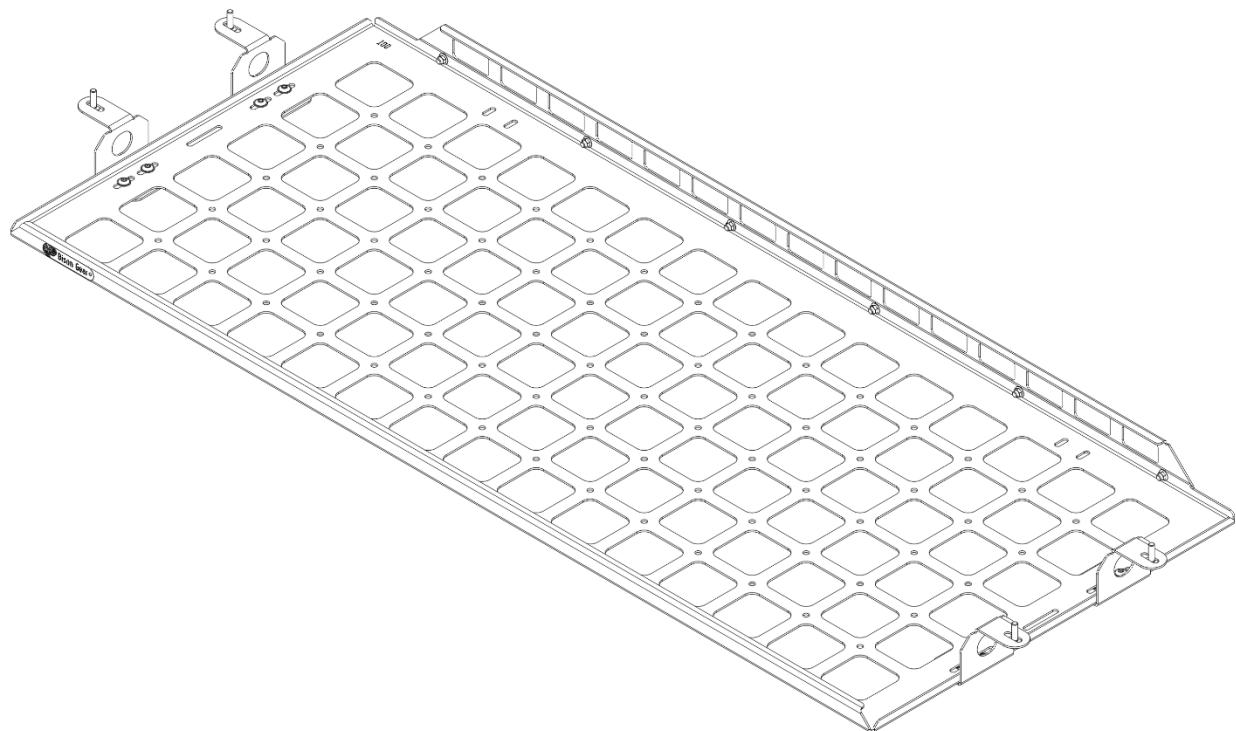



BISON GEAR

💡 Before you start

Familiarize yourself with these instructions. The Roof Shelf is shipped in one parcel. Ensure that all listed parts and hardware are present in the package. Gather the required tools. **Do not use the 3rd row of seats while the shelf is installed.**

⚙️ Part list

LP	PART	QTY	IMAGE
1	Shelf	1	
2	Front panel	1	
3	“Z” Bracket	4	



BISON GEAR

4	“C” Bracket	2	
5	M5x12 Flange bolt ISO 7380-2	6	
6	M6x12 Flange bolt ISO 7380-2	8	
7	M6x20 Flange bolt ISO 7380-2	4	
8	M5 Flange nut DIN 6923	6	
9	M6 Flange nut DIN 6923	8	



BISON GEAR

☒ List of necessary tools¹:


- **3 mm Allen Key (Hex)**
- **4 mm Allen Key (Hex)**
- **8 mm wrench**
- **10 mm wrench**

¹ NOTE: The tools are not the part of the set.



BISON GEAR


Version A

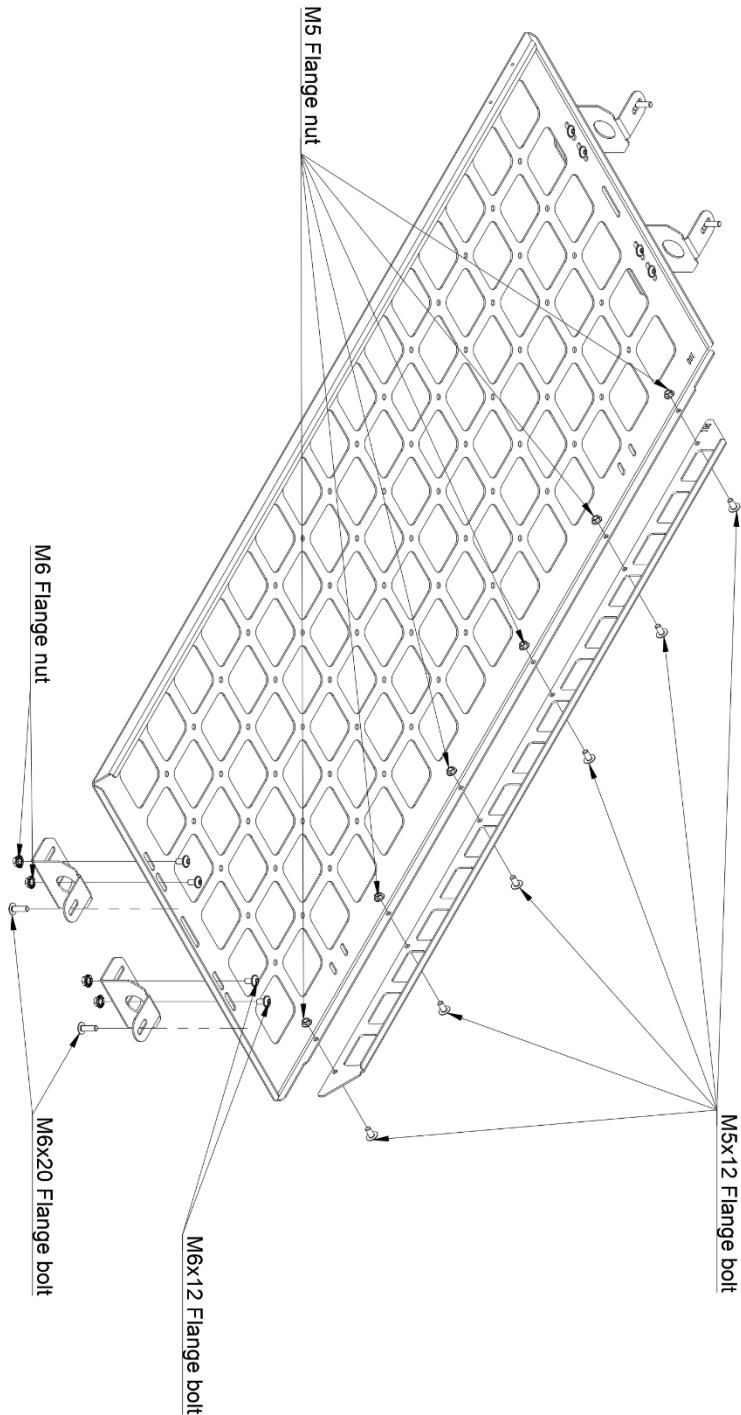



BISON GEAR

Version B

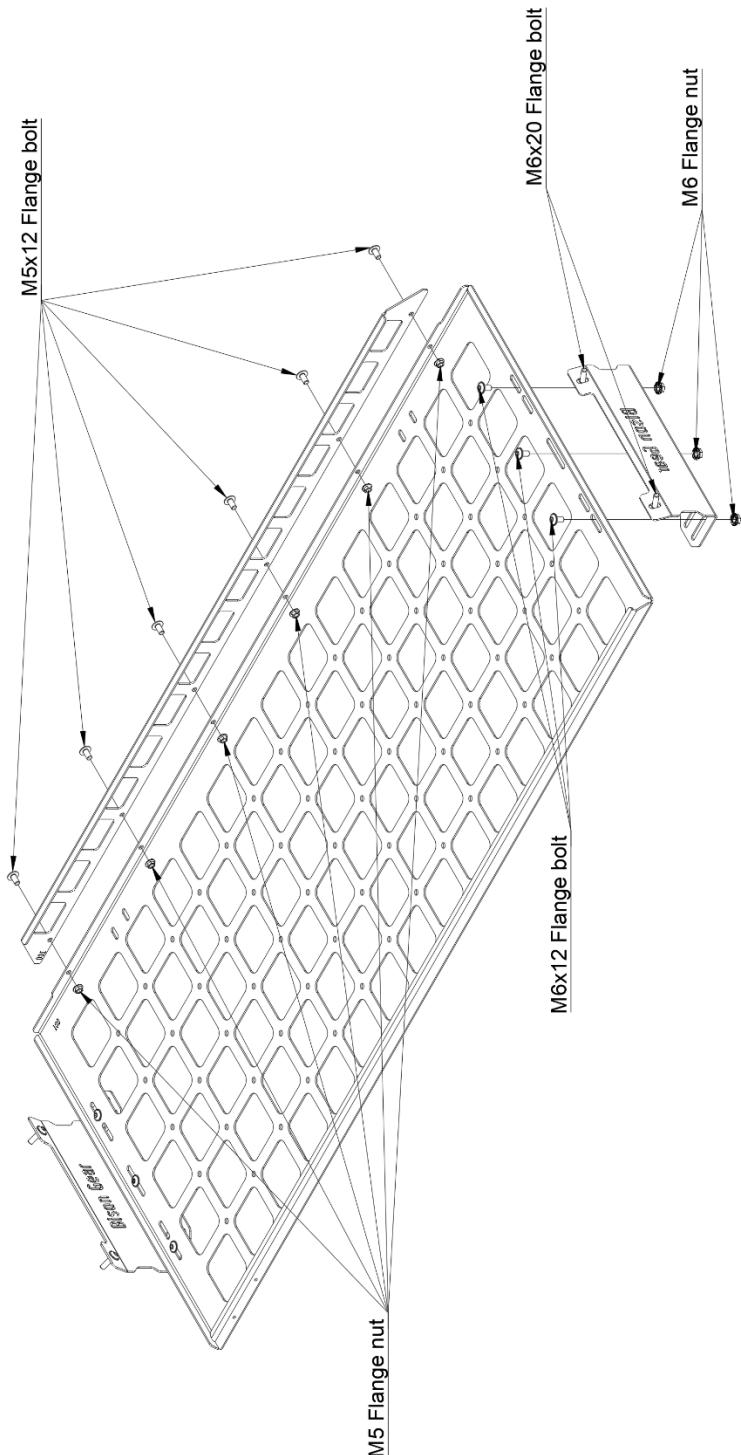



⚙️ Installation:

Before you start working, familiarize yourself with **the diagrams** displayed on **pages 5 and 6**. Depending on the trim level of your car **Version A** (using the “Z” brackets) or **Version B** (using the “C” brackets) will fit your car better, try both and choose the better option.

1. Gather all the necessary tools and parts.
2. Screw **the front panel** and **the shelf** together using **M5x12 flange bolts** and **M5 flange nuts**.
3. Remove the rear **grab handles** from the roof of your vehicle.
4. Pre-screw the brackets (**Version A or B**) using **M6x20 flange bolts**.
5. Put **the shelf** on top of **the brackets**.
6. Align the shelf for the best fitment in all directions.
7. Screw **the shelf** down to **the brackets** using **M6x12 flange bolts** and **M6 flange nuts**.
8. Tighten all the bolts.

Make sure that everything is mounted properly, and all the bolts are tightened. If everything is correct, your work is done.

After driving 50 km, check all the bolts and re-tighten them if necessary.



BISON GEAR

Have a great time with the Bison Gear product!



Email: contact@bison-gear.com

Phone: +48 505 642 981