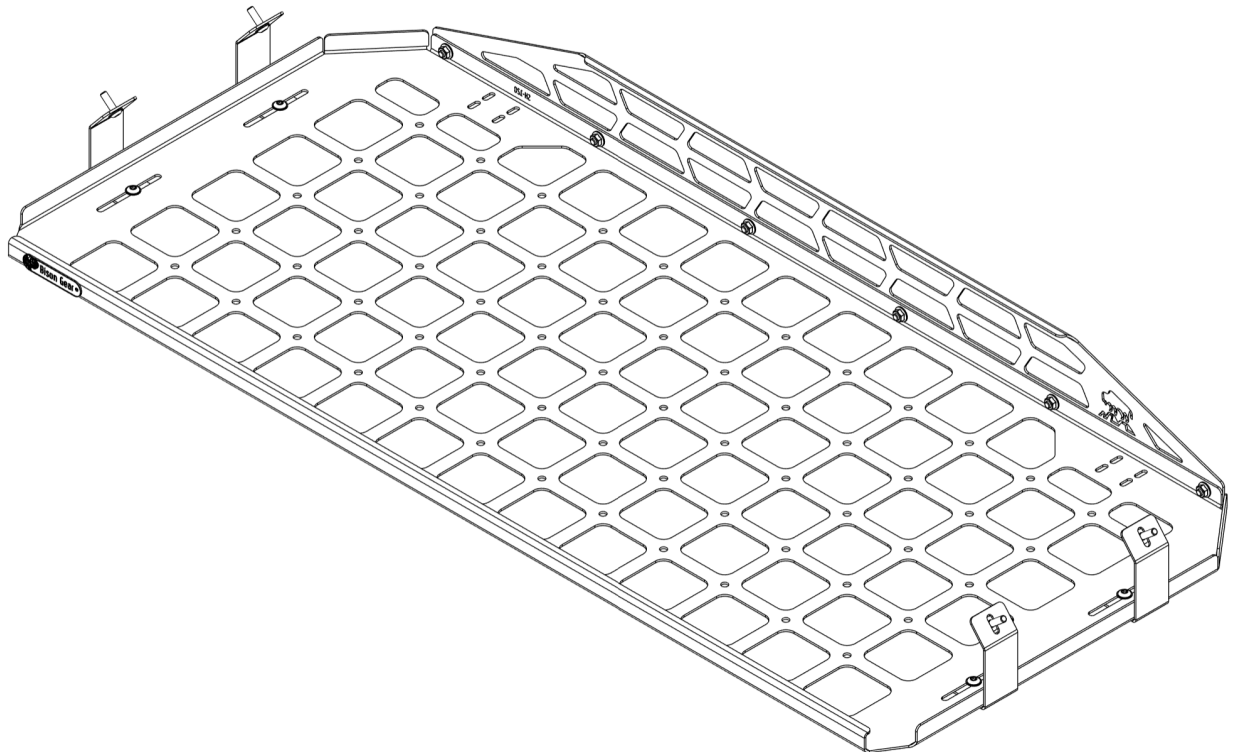




BISON GEAR

Toyota LC120 / Lexus GX470 Roof Shelf Installation Guide

SH-120



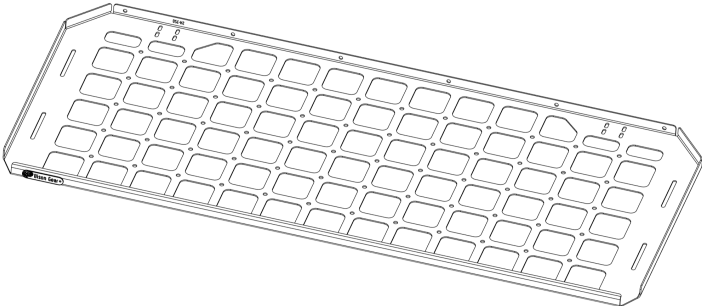
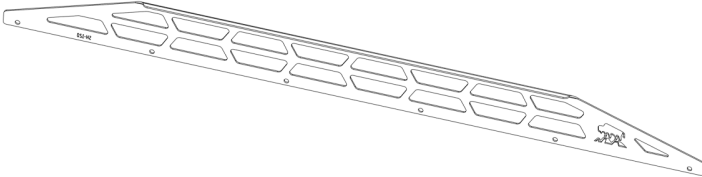


Before you start

Familiarize yourself with these instructions. **The Bison Gear Roof Shelf** is shipped in one package. Ensure that all listed parts and hardware are present. Locate a flat surface or floor with a minimum area **1 x 1.5 m**. Gather the required tools.





BISON GEAR

Part list

LP	PART	QTY	IMAGE
1	SH-120 - Shelf	1	
2	SH-120 Front panel	1	
3	SH-120 Bracket of the shelf	4	
5	Flange bolt M6x12 ISO 7380-2	10	



BISON GEAR

6	Flange bolt M6x20 ISO 7380-2	4	
7	Flange nut M6 DIN 6923	10	

List of necessary tools¹:

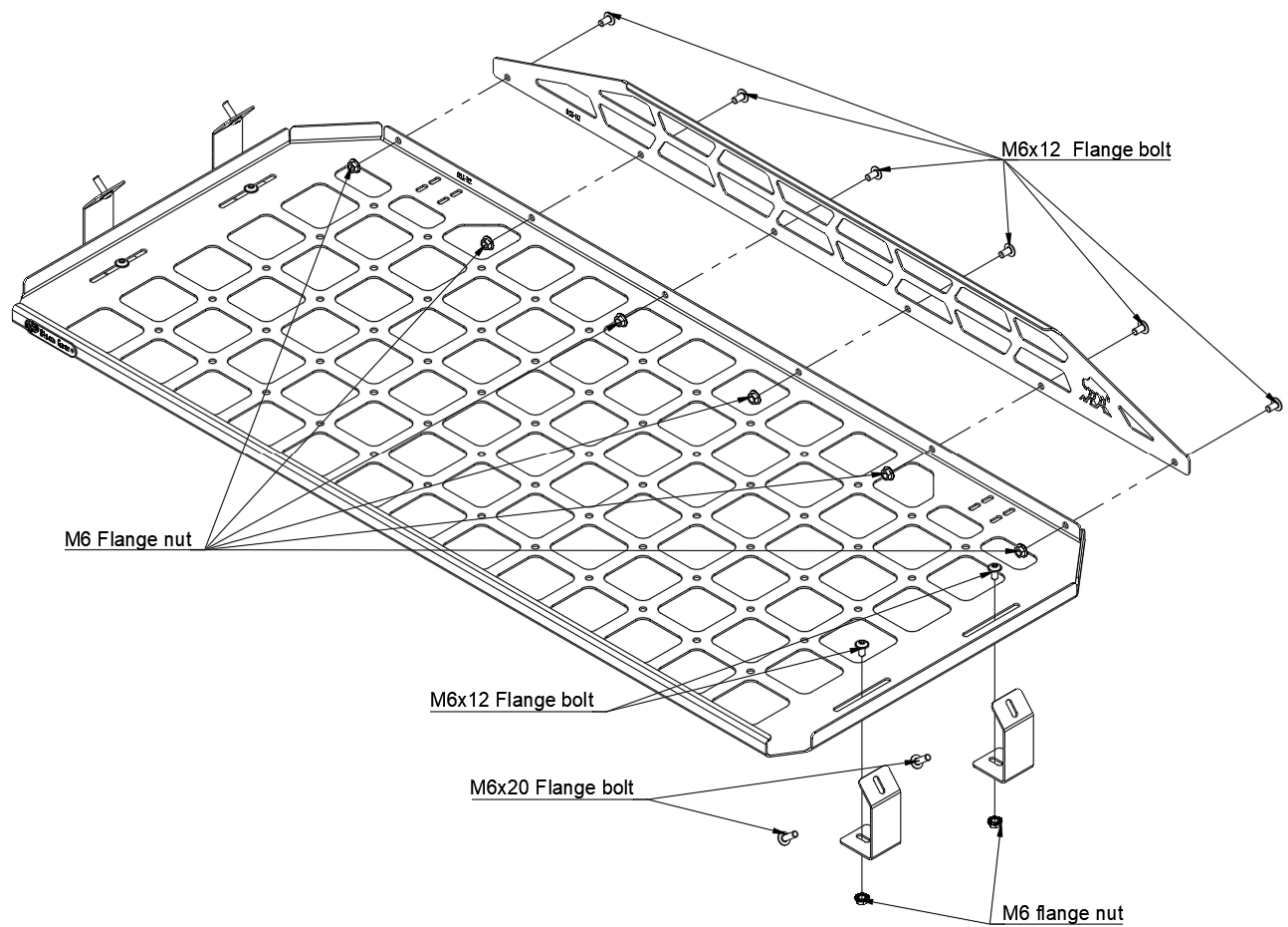
- 4 mm Allen Key (Hex)
- 10 mm wrench

¹ The tools **are not** included in the set.



BISON GEAR

Roof Shelf Diagram





Installation:

Before you start to work, familiarize with the **Roof Shelf Diagram** on **page 4**. There is an exploded view that shows you how to install the roof shelf. Follow the steps below to install the product correctly:

1. Assemble the **shelf** and **front barrier** together on the ground or other flat space using **M6x12 bolts** and **M6 nuts**.
2. Unscrew the **under the roof handle** on the left and right side in your car.
3. Pre-screw the **brackets of the shelf** in the place of the handle.
4. Put the shelf to the car and screw it to the brackets using **M6x12 bolts** and **nuts M6**.
5. Regulate the **vertical** and **horizontal** position of the shelf and screw **all the bolts**.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50km, check all the bolts and re-tighten them if necessary.



BISON GEAR

Have a great time with Bison Gear products!



Email: contact@bison-gear.com

Phone: **+48 505 642 981**