




**BISON GEAR**

# Toyota Land Cruiser 150 / Lexus GX 460 Roof Shelf Installation Guide

**SH-150**

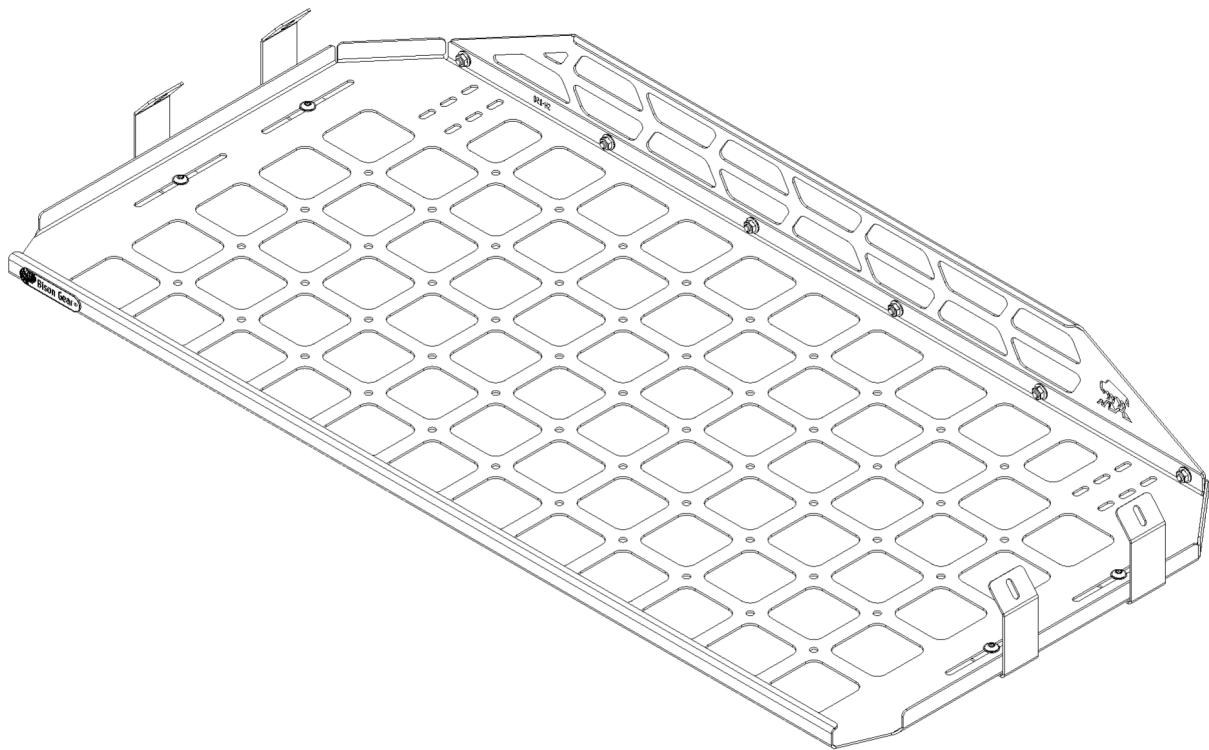

## 💡 Before you start

Familiarize yourself with these instructions. Ensure that all listed parts and hardware are present. Gather the required tools.





**BISON GEAR**

## ⚙️ Part list

LP	PART	QTY	IMAGE
1	Shelf	1	
2	Front barrier	1	
3	Mounting bracket	4	
4	Flange bolt M6x20 ISO 7380-2	4	



**BISON GEAR**

5	Flange bolt M6x12 ISO 7380-2	<b>10</b>	
6	Flange nut M6 DIN 6923	<b>10</b>	

## List of necessary tools<sup>1</sup>:

- **4 mm Allen Key (Hex)**
- **10 mm wrench**


---

<sup>1</sup> NOTE: The tools are not included in the set.



**BISON GEAR**

## Roof Shelf - Diagram

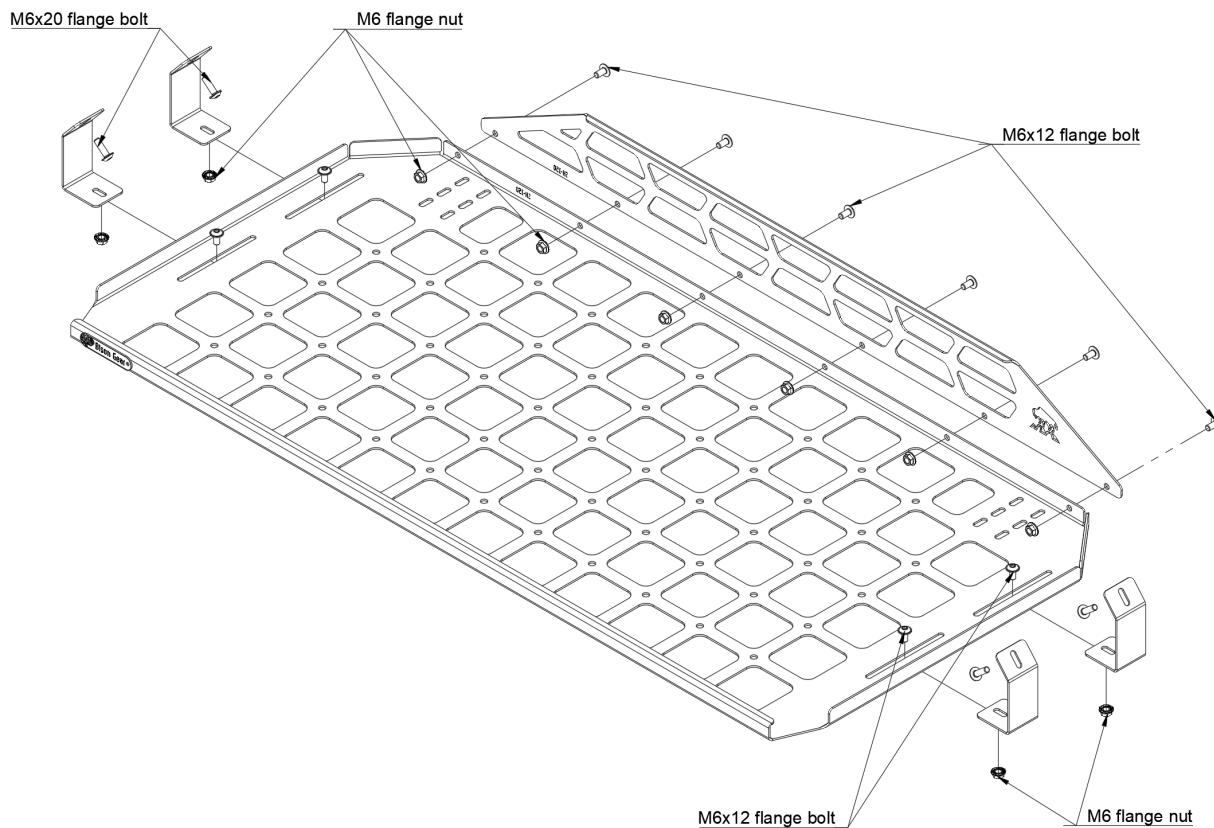



**BISON GEAR**

## ⚙️ Installation:

Before you start to work, familiarize with the **Diagram on page 4**. There is an exploded view that shows you how to assemble the shelf parts together. Follow the steps below to install the product correctly:

1. Screw the **front panel** and **shelf** together using **M6x12 flange bolts** and **M6 flange nuts**.

!!! The shelf is mounted in the boot (under the roof) of the car in place of the top handle.

2. Unscrew the **upper handle** on the left and right side of the car.
3. Pre-screw the **shelf bracket** using **M6x20 flange bolts**.
4. Place the previously prepared **shelf** on the brackets.
5. Pre-screw the **shelf** using **M6x12 bolts** and **M6 nuts**.
6. Adjust the **position** of the shelf.
7. Tighten all the **bolts** and **nuts**.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.



**BISON GEAR**

**After driving 50km, check all the bolts and re-tighten them if necessary.**

**Have a great time with the Bison Gear product!**



Email: [contact@bison-gear.com](mailto:contact@bison-gear.com)

Phone: **+48 505 642 981**