


INEOS Grenadier Additional Steps for Rocksliders Installation Guide

STEP-GRND

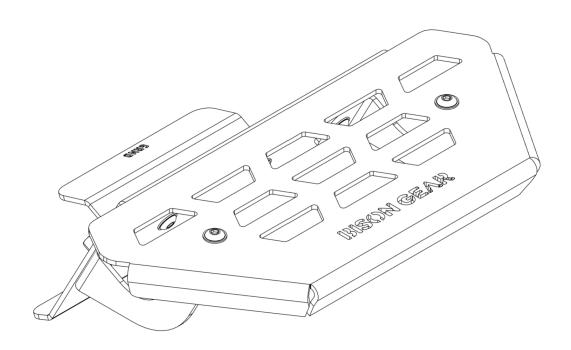

- Ġ- Before you start

Familiarize yourself with these instructions. The steps are shipped in one package. The kit includes <u>two pieces</u> of steps. Ensure that all listed parts and hardware are present. Gather the required tools.

bison-gear.com Page 1 of 6



Part list

LP	PART	QTY	IMAGE
1	STEP	2	
2	Left bracket	2	
3	Right bracket	2	

bison-gear.com Page 2 of 6



4	Back bracket	2	GRND
5	Flange bolt M6x16 ISO 7380-2	12	
6	Flange nylon nut M6 DIN 6926	12	


X List of necessary tools:

- 4 mm Allen Key (Hex)
- 10 mm wrench

bison-gear.com Page 3 of 6



Step Diagram

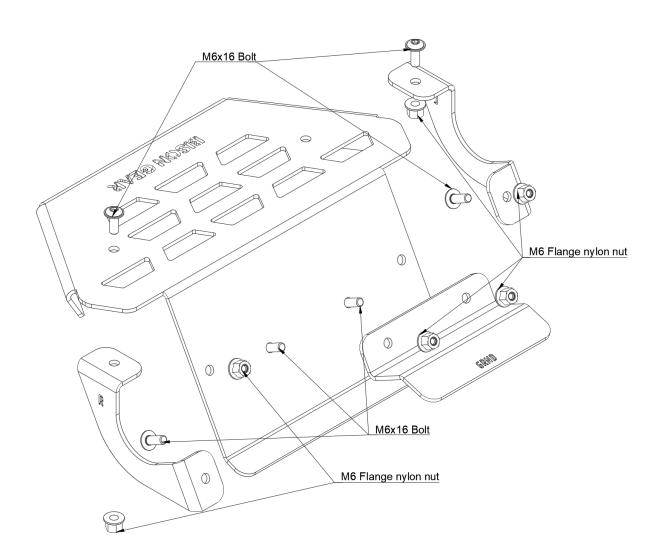


bison-gear.com Page 4 of 6



(A) Installation:

Before you start to work, familiarize with the **Step Diagram** on **page 4**. There is an exploded view that shows you how to install the roof shelf. Follow the steps below to install the product correctly:

- 1. To begin with, you need to think about where to mount the step. Steps can be mounted along the entire length of the rockslider.
- 2. Put the **step** between the rocksliders pipes, as shown in the picture below. (The top part of step should lie down on the upper pipe and the lower part should be under the bottom pipe.)

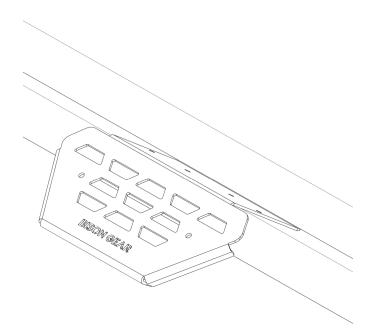

3. Pre-screw **all brackets** according to the diagram, using **M6x16 bolts** and **M6 nylon flange nuts**.

!!!



(If the kit includes a standard (non-nylon) flange nut, use threadlocker (supplied with the kit) to prevent the nuts from loosening (put a drop on the bolt or nut).

4. Tighten all the bolts and nuts.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50km, check all the bolts and re-tighten them if necessary.

Have a great time with the Bison Gear product!



Email: contact@bison-gear.com

Phone: +48 505 642 981

bison-gear.com Page 6 of 6