




BISON GEAR

INEOS Grenadier Additional steps for rocksliders Installation Guide

STEP-GRND

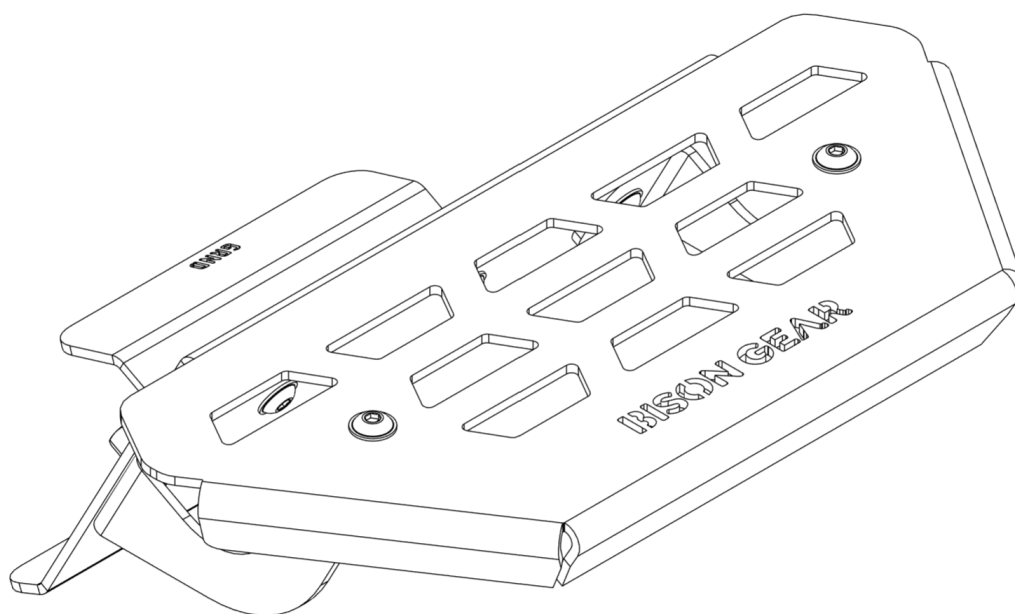





BISON GEAR

Before you start






Before installation:

- Familiarize yourself with these instructions.
- Ensure that all listed parts and hardware are included in the package.
- Gather the required tools.

Part list

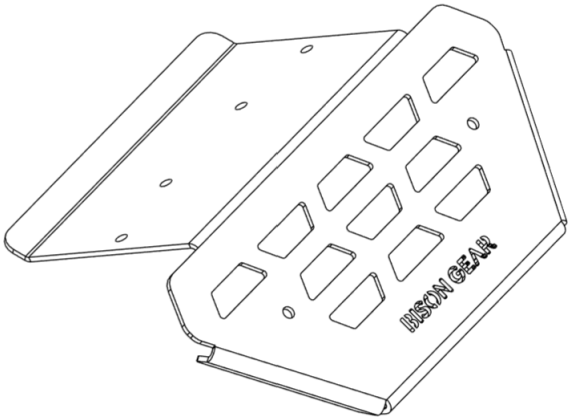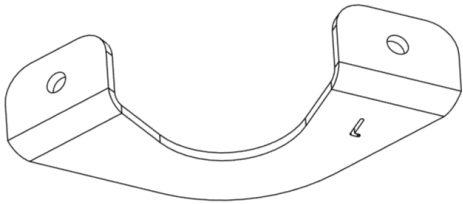LP	PART	QTY	IMAGE
1	STEP	2	
2	Left bracket	2	

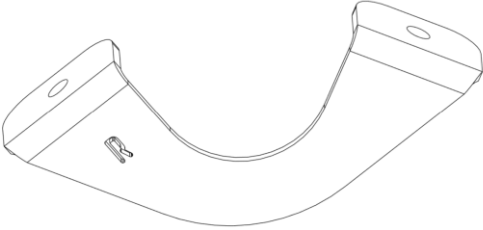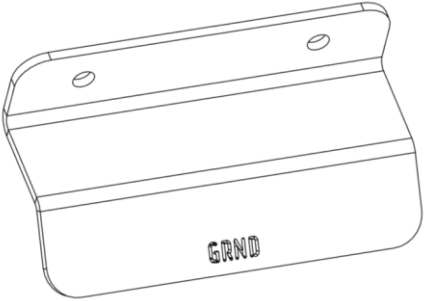

3	Right bracket	2	
4	Back bracket	2	
5	Flange bolt M6x16 ISO 7380-2	12	
6	Flange nut M6 DIN 6926	12	
7	Thread glue	1	




List of necessary tools¹:

- 4 mm Allen Key (Hex)
- 10 mm wrench

Torque settings:

During assembly, use the recommended tightening torques for screw, unless other parameters are specified for a given connection.

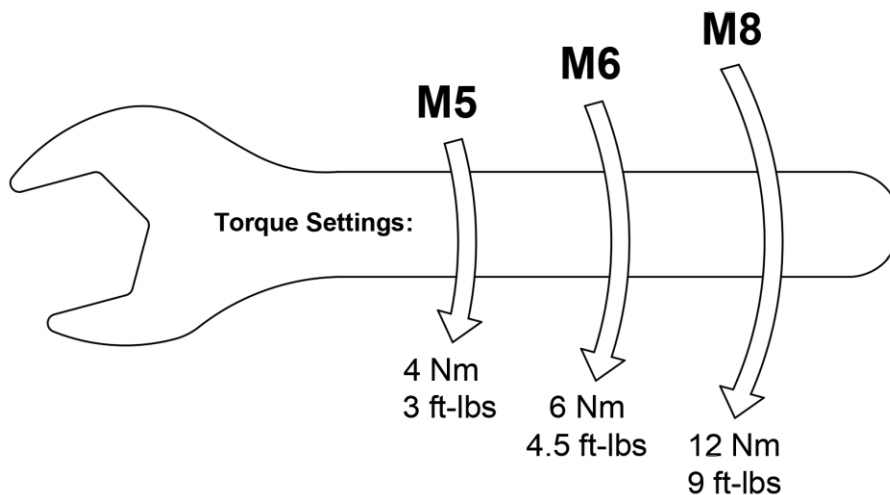


¹ The tools are not included in the set



BISON GEAR

Step Diagram

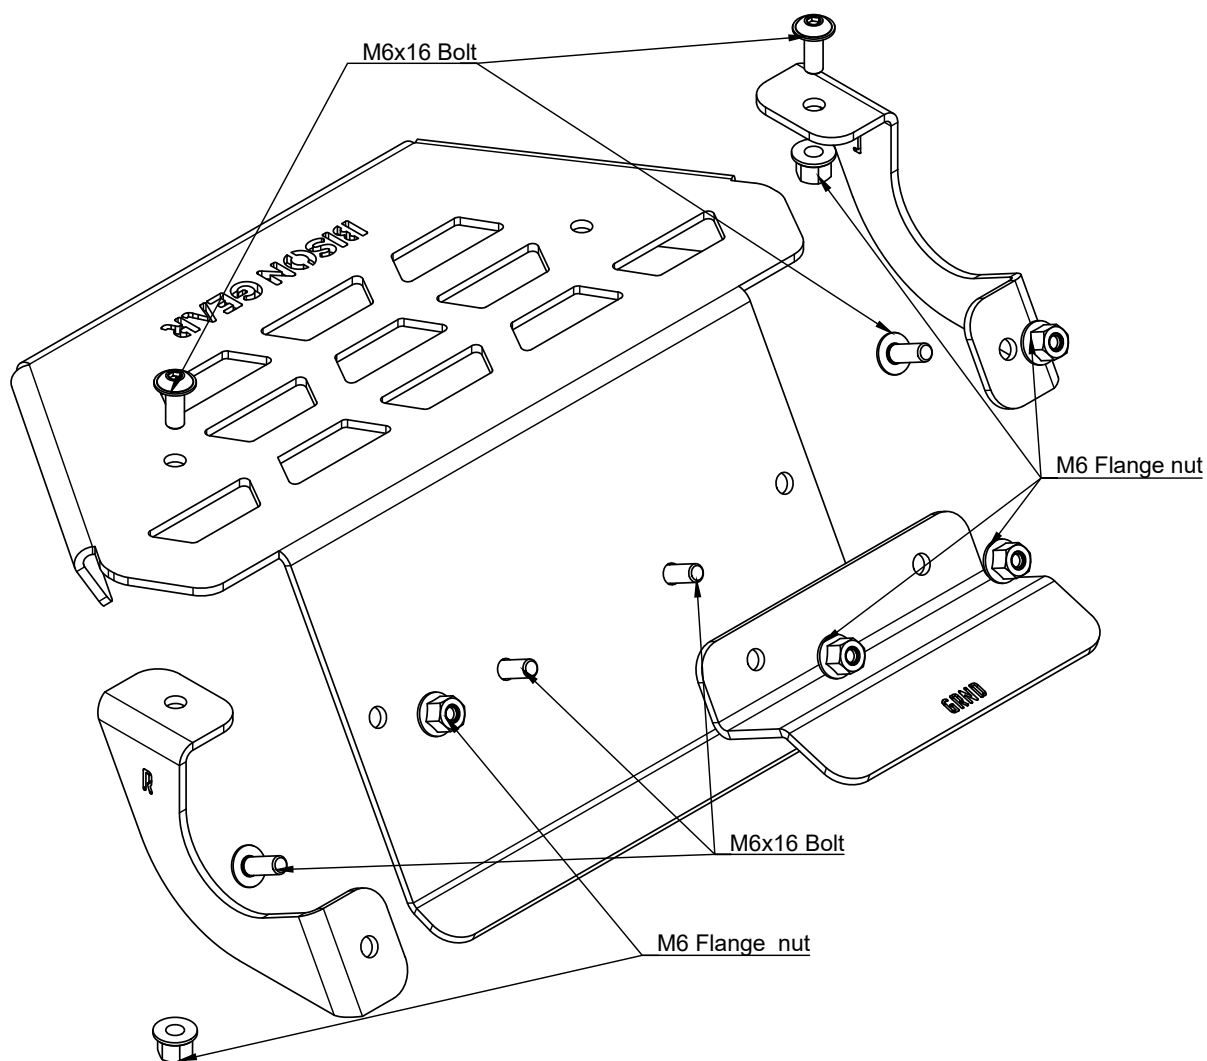




BISON GEAR

Installation:

Before you start to work, familiarize with the **Diagram** on **page 4**. There is an exploded view that shows you how to install the roof shelf. Follow the steps below to install the product correctly:

1. To begin with, you need to think about where to mount the step. Steps can be mounted along the entire length of the rockslider.
2. Put the step between the rocksliders pipes, as shown in the picture below. (The top part of step should lie down on the upper pipe and the lower part should be under the bottom pipe.)

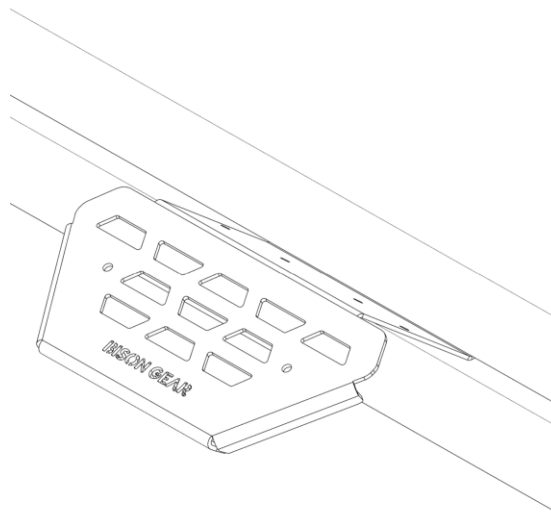

3. Pre-screw **all brackets** according to the diagram. Use thread glue to keep the nuts from loosening (put a drop on the bolt or nut).
4. Tighten all the bolts and nuts.

Make sure that everything is mounted properly, and all the bolts are tightened. If it everything is correct, your work is done.

After driving 50km, check all the bolts and re-tighten them if necessary.



BISON GEAR

Have a great time with Bison Gear products!



Email: contact@bison-gear.com

Phone: **+48 505 642 981**