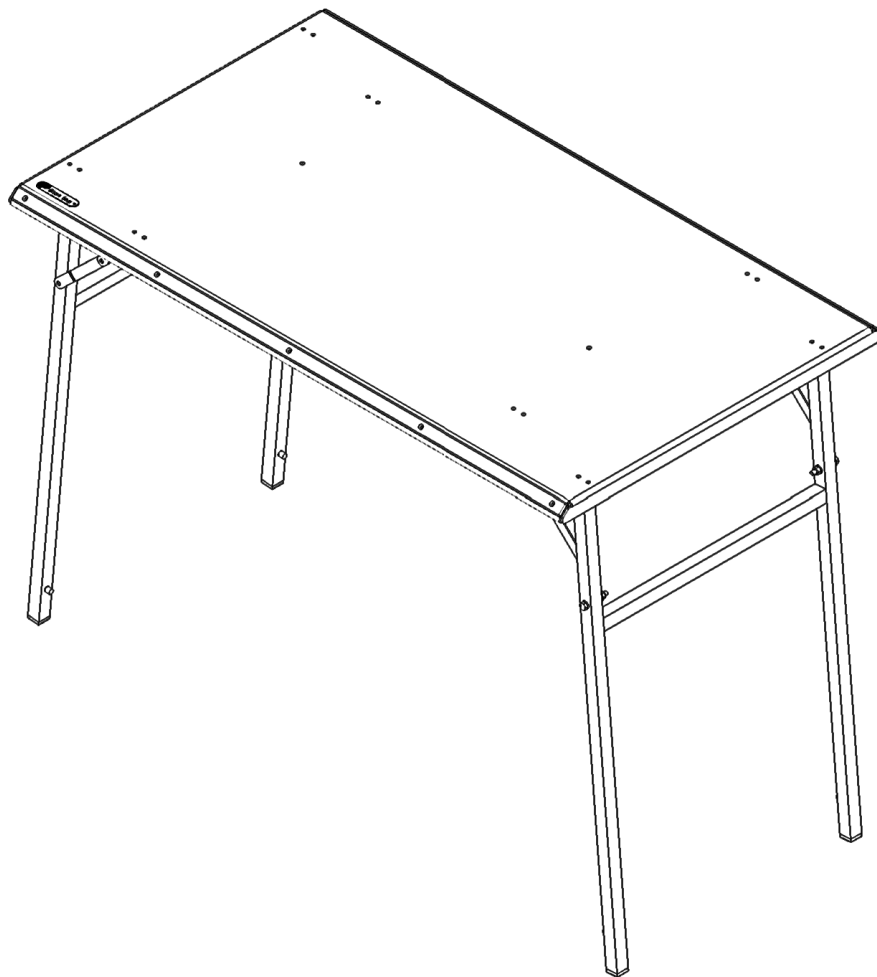




BISON GEAR

Camping Table Installation Guide

TBL-CAMP-02



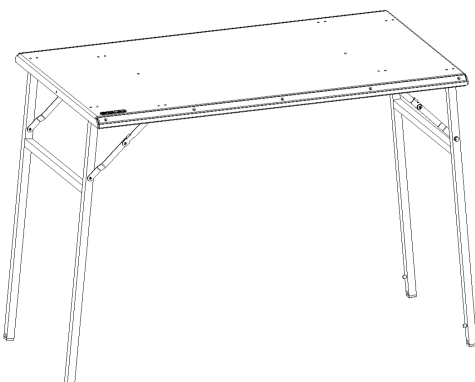
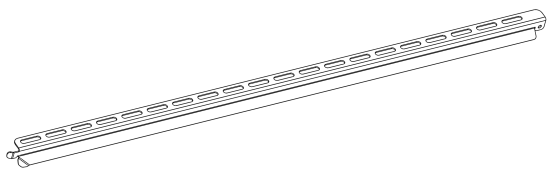
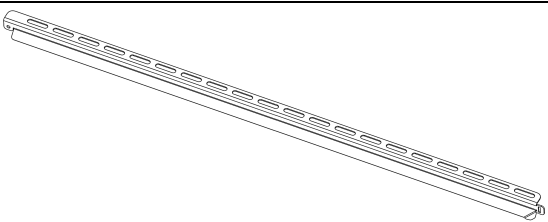
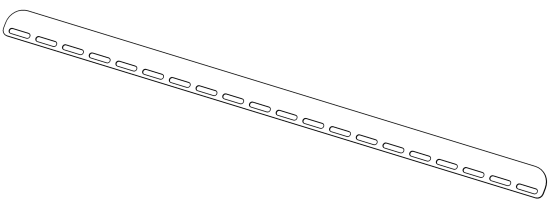


BISON GEAR

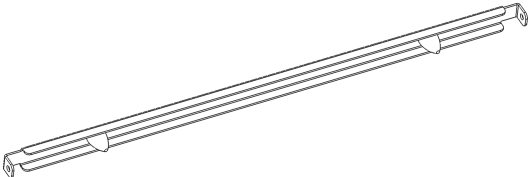
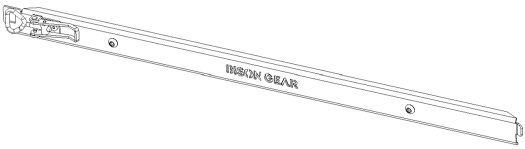




Before you start

Familiarize yourself with these instructions. Ensure that all listed parts and hardware are present in package. Gather the required tools. The installation requires one adult people.

Part list

No.	PART	QTY	IMAGE	<input checked="" type="checkbox"/>
1	Camping table	1		
2	Left guide	1		
3	Right guide	1		
4	Upper guide	2		

**BISON GEAR**

5	Back bumper	1		
6	Table closing	1		
7	Flange nut M6 DIN 6923	2		
8	Flange nut M8 DIN 6923	4		
9	T-Slot M8x20 bolt	4		
10	Bolt M6x12 ISO 7380-2	2		

List of necessary tools¹:

- 4 mm Allen Key (Hex)
- 10 mm wrench
- 13 mm wrench

¹ NOTE: The tools **are not** included in the set.

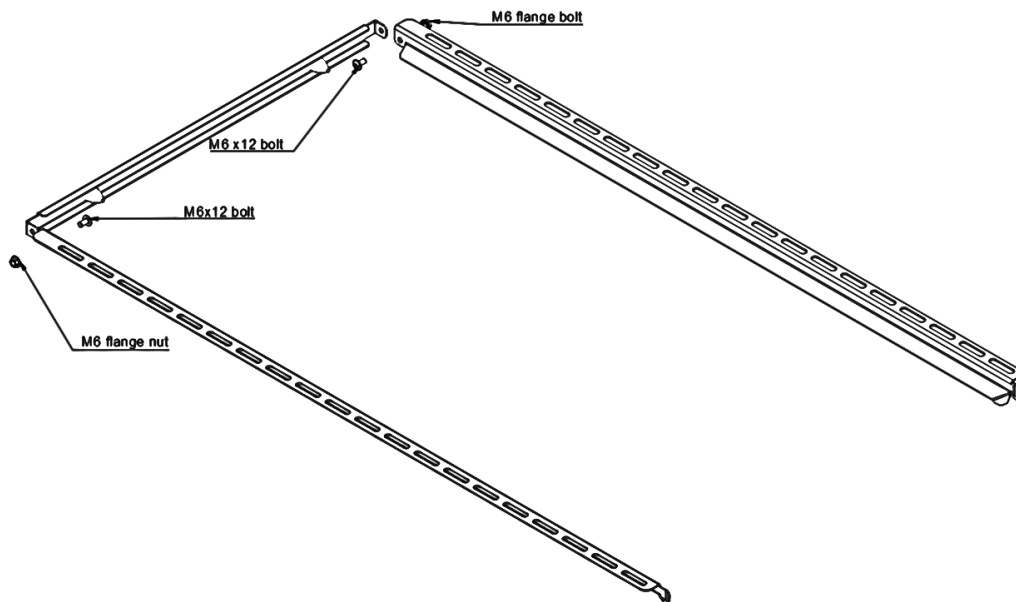


BISON GEAR

Installation:

Follow the steps below to install product correctly:

1. Start by preparing the product parts and gathering the necessary tools.
2. Screw together **left guide**, **right guide** and **back bumper** together using **M6x12 bolts** and **M6 nuts**.

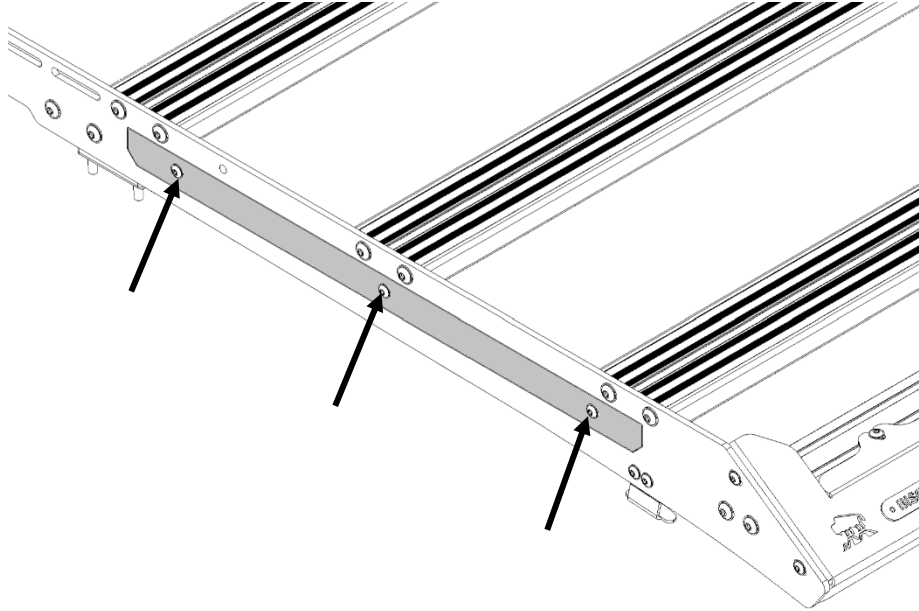


If you have Roof Rack from Bison Gear with camping table side mount possibilities, you need to remove some parts from your roof rack before you start installing the camping table guides.

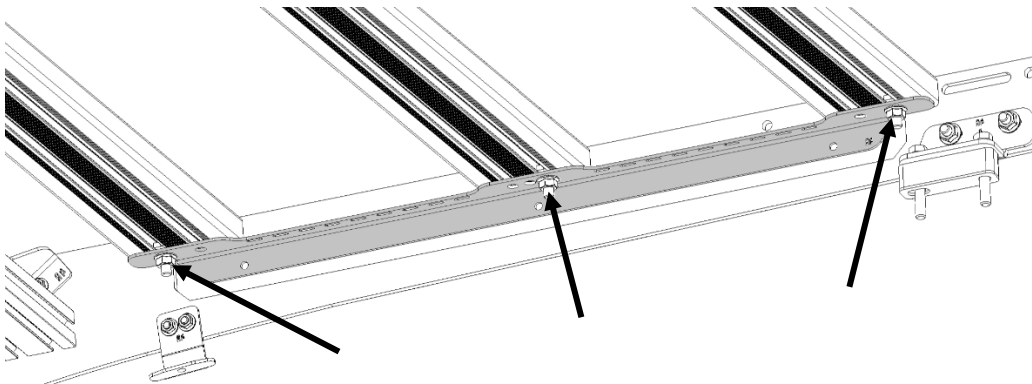


BISON GEAR

- A. Unscrew the **rail gap cover** (unscrew the three **M6 flange bolts** and **nuts**) from the side where the table will be slid out (left or right).



- B. Remove the support bracket (unscrew the three **M8 flange nuts**). Remove the **middle T-Bolt**, the **side bolts** you can leave – you can use it to screw the table guide.

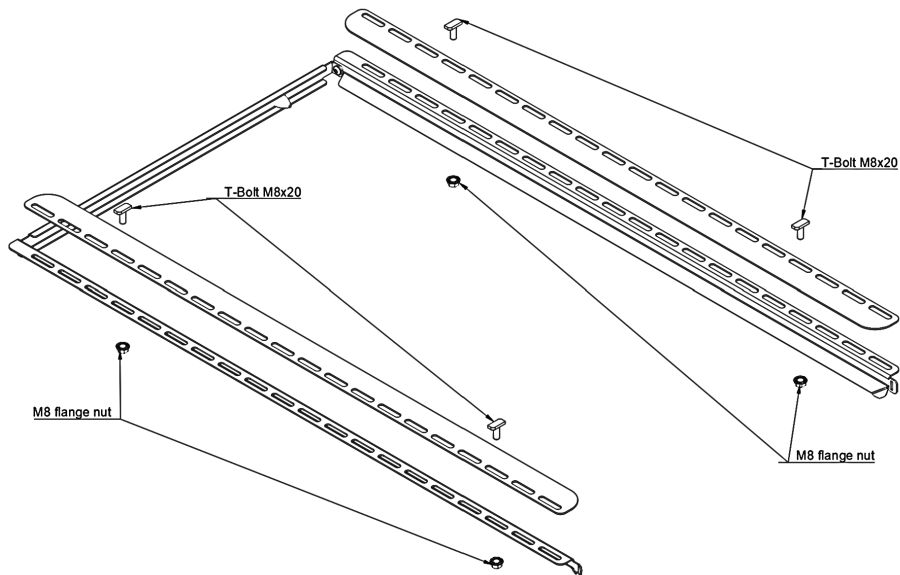


3. Pre-screw the table guide to the roof rack. Place the upper guide on the left and right guides (the oblong holes in both parts should match). Screw the whole construction to the roof rack using **M8 T-slot bolts** and **M8**



BISON GEAR

flange nuts. There are many holes in the guides, choose the best ones for you and your roof rack.



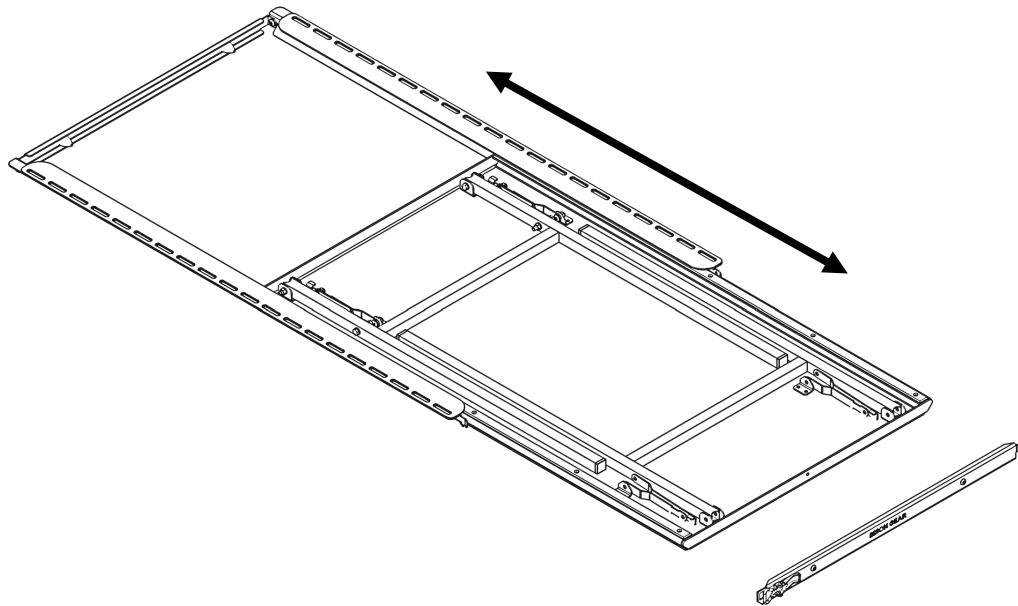
4. Check the dimension with the following drawing. Regulate if it necessary and tighten the nuts.



5. Slide the table into the previously assembled guides and close using table closing part (regulate the latch if necessary).



BISON GEAR



Make sure that everything is mounted properly, and all the bolts are tightened.
If it everything is correct, your work is done.

After driving 50km with table, check all the bolts and retighten them if necessary.



BISON GEAR

Have a great time with Bison Gear product!



Email: contact@bison-gear.com

Phone: +48 505 642 981