



BISON GEAR

Camping table Installation Guide

TBL-CAMP-03





BISON GEAR

💡 Before you start

Before installation:

- Familiarize yourself with these instructions.
- Ensure that all listed parts and hardware are included in the package.
- Prepare a flat surface or floor with a minimum area of 1 x 1.5 meters.
- Gather the required tools.

⚙️ Part list

No.	PART	QTY	IMAGE	
1	Camping table	1		<input checked="" type="checkbox"/>
2	Left guide	1		<input type="checkbox"/>
3	Right guide	1		<input type="checkbox"/>



BISON GEAR

4	Upper guide	2	
5	Back bumper	1	
6	Table closeing	1	
7	Flange nut M6 DIN 6923	2	
8	Flange nut M8 DIN 6923	4	
9	T-Slot M8x20 bolt	4	
10	Bolt M6x12 ISO 7380-2	2	




☒ List of necessary tools¹:

- 4 mm Allen Key (Hex)
- 10 mm wrench
- 13 mm wrench

☒ Torque settings:

During assembly, use the recommended tightening torques for screw, unless other parameters are specified for a given connection.

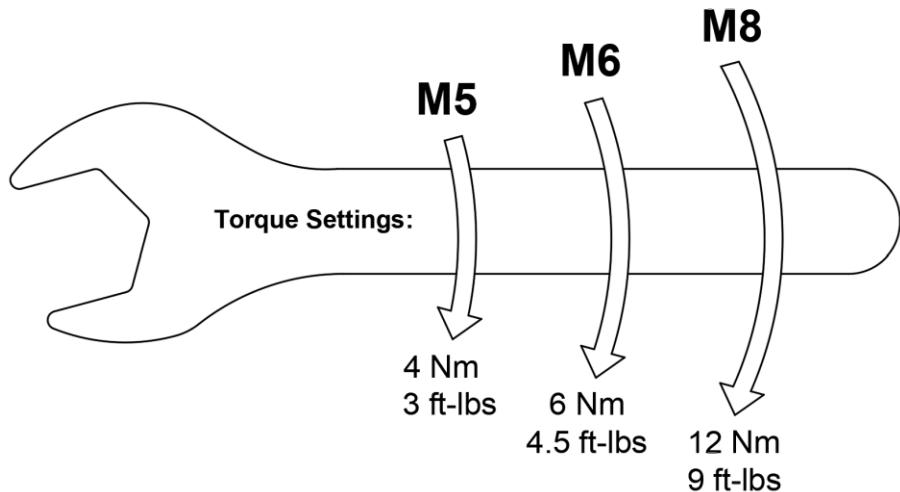

¹ NOTE: The tools **are not** the part of the set.




BISON GEAR

⚙️ Installation:

Follow the steps below to install product correctly:

1. Start by preparing the product parts and gathering the necessary tools.
2. Screw together **left guide**, **right guide** and **back bumper** together using **M6x12 bolts** and **M6 nuts**.

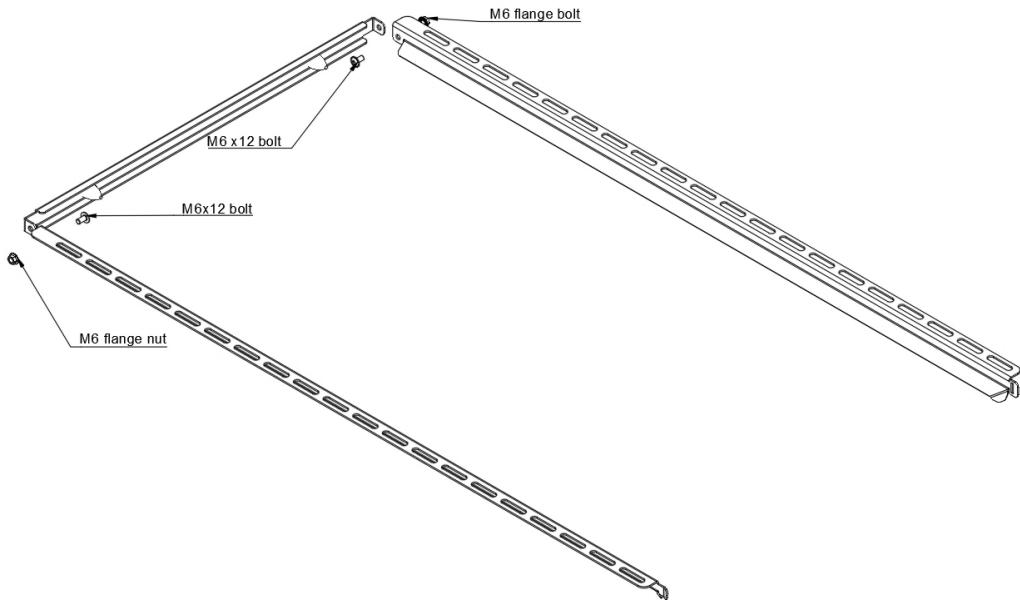



BISON GEAR

The camping table has two installation option on the roof rack:

1. Side-mount to the Bison Gear roof rack, which supports this type of mounting. (page 6-9)
2. Back-mount under the roof rack crossbars. (page 9-12)

The following instruction describes the both installation way. Choose the best for you and follow the steps.


INSTALLATION OPTION 1

If you have Roof Rack form Bison Gear with camping table side mount possibilities, you need to remove some parts from your roof rack before you start installing the camping table guides.


- A. Unscrew the rail gap cover (unscrew the three M6 flange bolts and nuts) from the side where the table will be slid out (left or right).



BISON GEAR

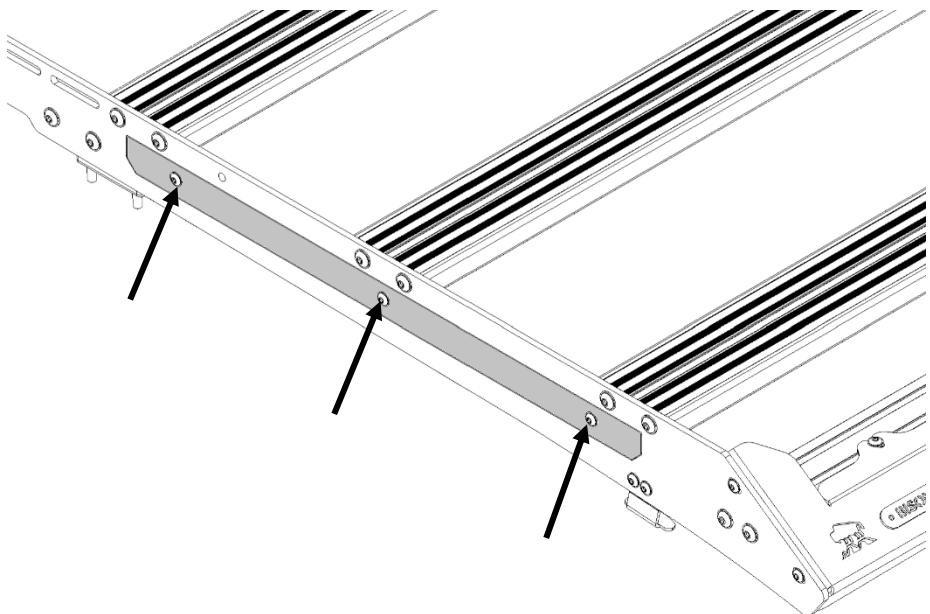

B. Remove the support bracket (unscrew the three M8 flange nuts).
Remove only the middle T-Bolt, the side bolts you can leave – you can use them to screw the table guide.

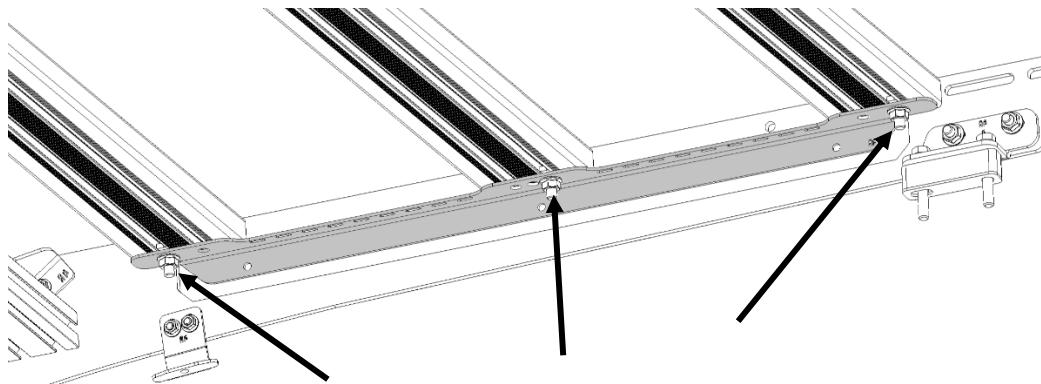


***** The instruction shows how to install the table on the left side of the roof rack. The roof rack is prepared for mounting the table on either side. Before you begin, choose the side that works best for you.**



BISON GEAR

C. Place the previously assembled table guide under the crossbars and pre-screw them using **M8x20 T-Slot bolts** and **M8 flange nuts** (there are a many holes in the guides, choose the best ones for you and your roof rack). Slide the guides as close as possible to the roof rack rail.

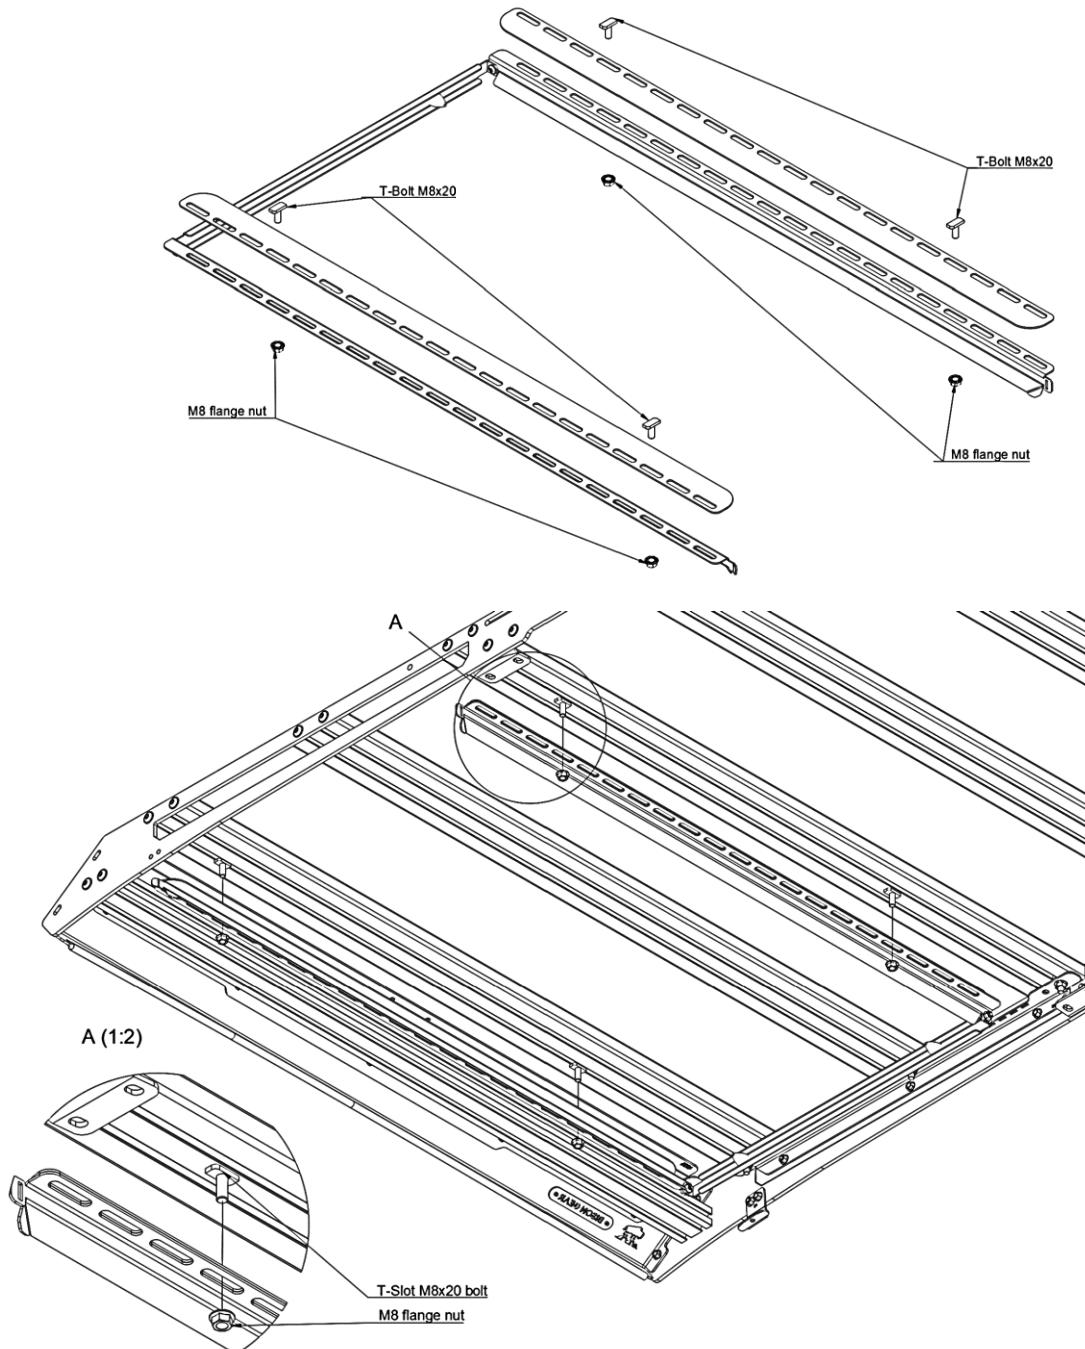




BISON GEAR

D. Check the dimension with the following drawing. Regulate if it necessary and tighten the nuts.



E. Slide the table into the previously assembled guides and close using table closing part (regulate the latch – if it necessary).

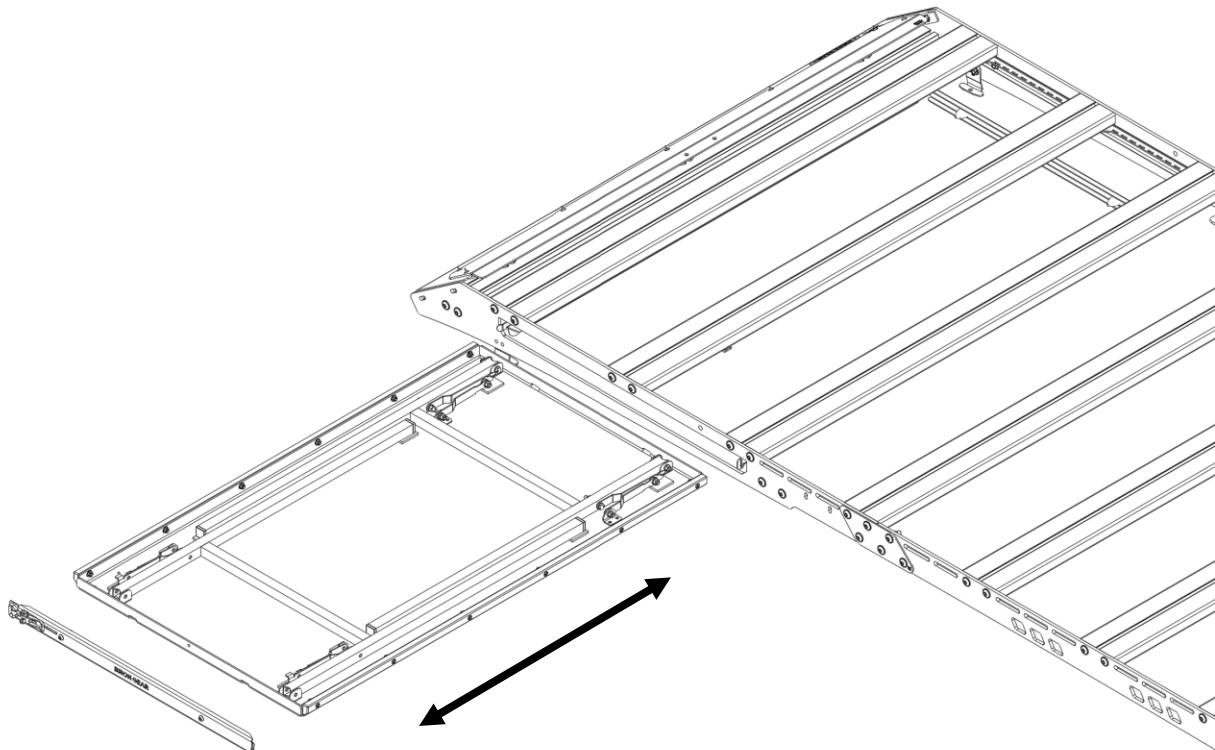




BISON GEAR

INSTALLATION OPTION 2


The second option applies to all cases where the camping table is mounted on the back of the roof rack, under the crossbars.

- I. Place the previously assembled table guide under the crossbars at the end of the rack (guides should start at least 5 mm before crossbar) and pre-screw them using **M8x20 T-Slot bolts** and **M8 flange nuts** (there are a many holes in the guides, choose the best ones for you and your roof rack).

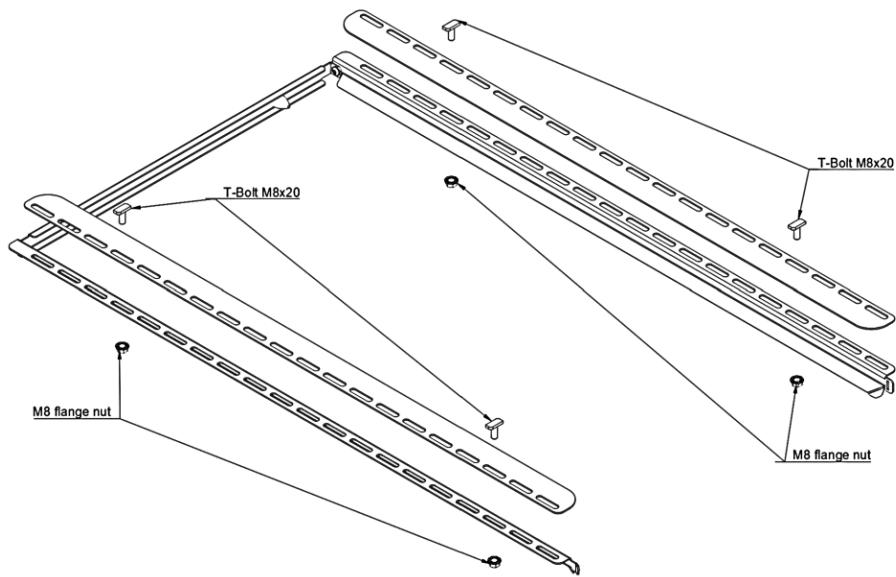



BISON GEAR

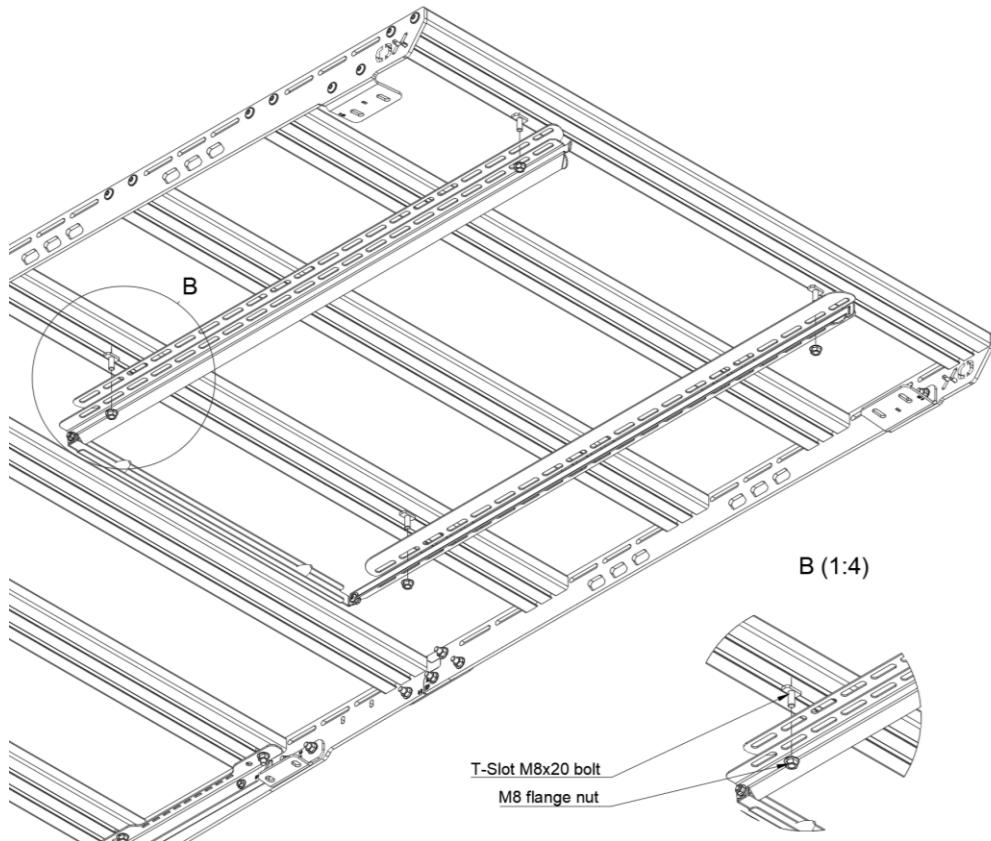


II. Check the dimension with the following drawing. Regulate if it necessary and tighten the nuts.





BISON GEAR

- III. Slide the table into the previously assembled guides and close using table closing part (regulate the latch – if it necessary).

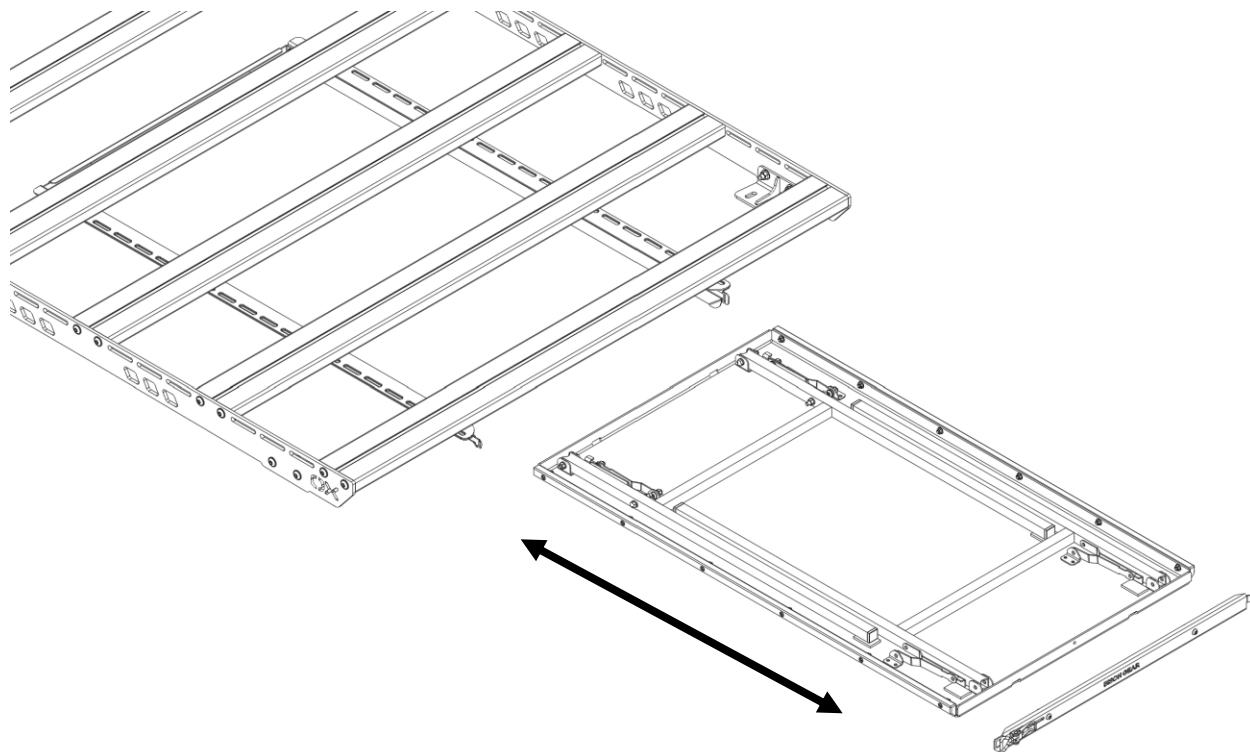

Make sure that everything is mounted properly, and all the bolts are tightened. If everything is correct, your work is done.

After driving 50km with table, check all the bolts and retighten them if necessary.



BISON GEAR

Have a great time with Bison Gear product!



Email: contact@bison-gear.com

Phone: **+48 505 642 981**