




Jeep Wrangler JL Shelf Installation guide

SH-WRN-JL



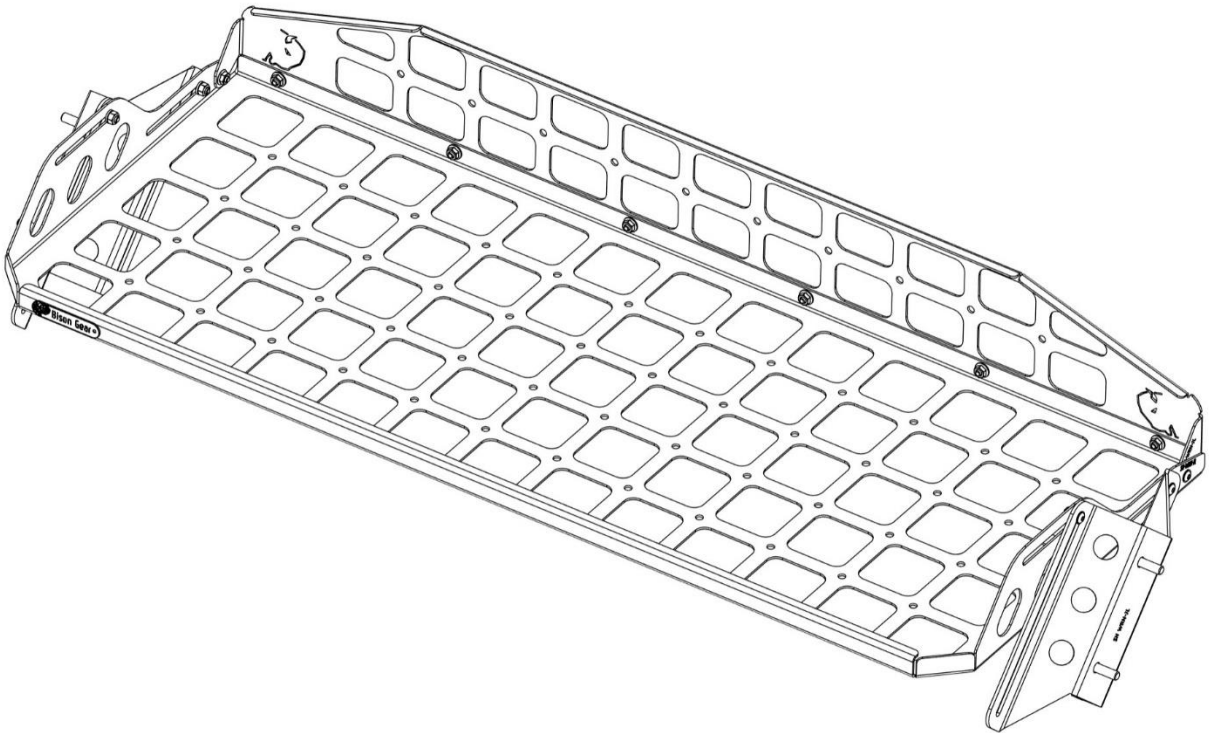


 Before you start










Familiarize yourself with these instructions. The shelf is shipped in one package. Ensure that all listed parts and hardware are present in package. Gather the required tools. The installation will necessitate two people.

Part list:

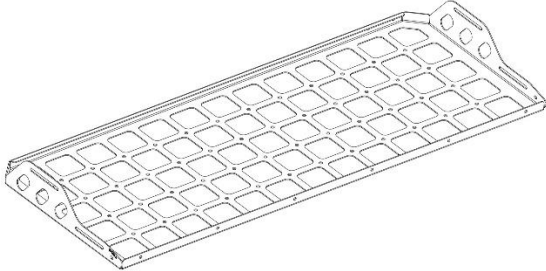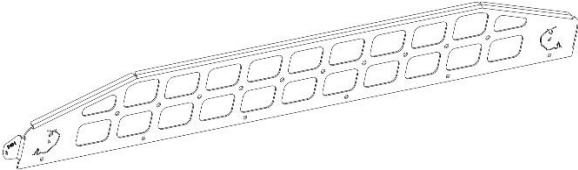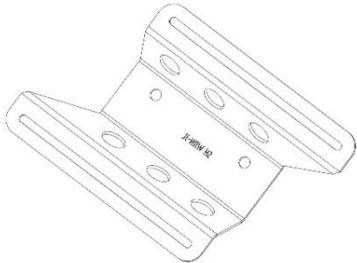LP	PART	QTY	IMAGE
1	SH-WRN-JL- Main Shelf	1	
2	SH-WRN-JL- Front panel	1	
3	SH-WRN-JL- Right Bracket	1	

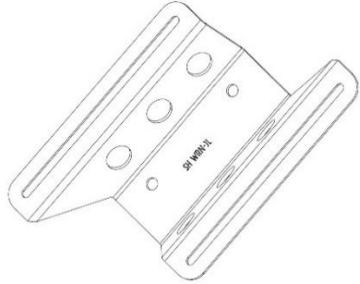


4	SH-WRN-JL- Left Bracket	1	
5	Bolt M5x12 ISO 7380-2	8	
6	Bolt M6x16 ISO 7380-2	4	
7	Bolt M8x25 ISO 7380-2	4	
8	Flange nut M5 DIN 6923	8	
9	Nut M6 DIN 985	4	
10	Flat washer M6 DIN 125	4	



List of necessary tools:

- 3 mm Allen Key (Hex)
- 4 mm Allen Key (Hex)
- 5 mm Allen Key (Hex)
- 8 mm wrench
- 10 mm wrench

Shelf diagram

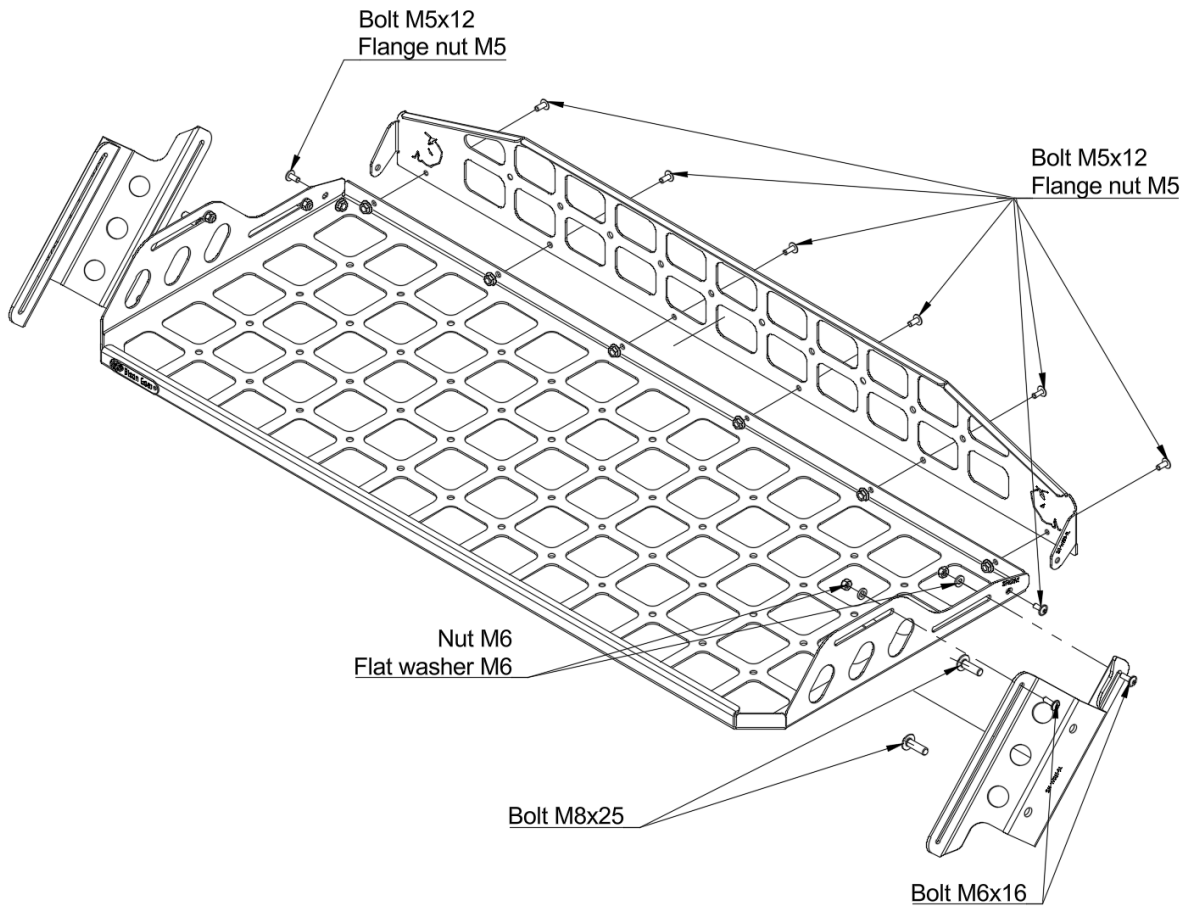

Installation :

Before you starts to work familiarize with upper diagram. There is an exploded view that shows you how to mount the shelf. Follow the steps below to mount the product correctly.

1. Dismount two (one on the left and one on the right side) factory plastic cover placed on the safety cage (picture below).



2. Mount right and left bracket using M8x25 bolts in factory covers place.

In the next step you have to have assist of one person who hold the shelf during the installation.

3. Place the shelf between two brackets and fasten it using M6x16 bolt, flat washer and M6 nut.
4. Before tightening the bolts, you can change the horizontal and vertical position of the shelf.
5. When you choose the best position for you – tighten the screws.

Make sure that everything is mounted properly and all the bolts are tighten. If it everything is correct, your work is done.

After driving 50km, check all the bolts and retighten them if necessary.

Have a great time with Bison Gear products!



Email: contact@bison-gear.com

Phone: +48 505 642 981